

• OUR PRODUCTS

PUPRIMABLERA WOODED ORWOOD TERRAZZO the corian surface

Intense WALLON Colorito Colorito Marble redefined

ONTARI® LOCKBOND® ACRYLIC CLYSTH

Lyssa : Proxet Desire : Surface

www.treelam.cor












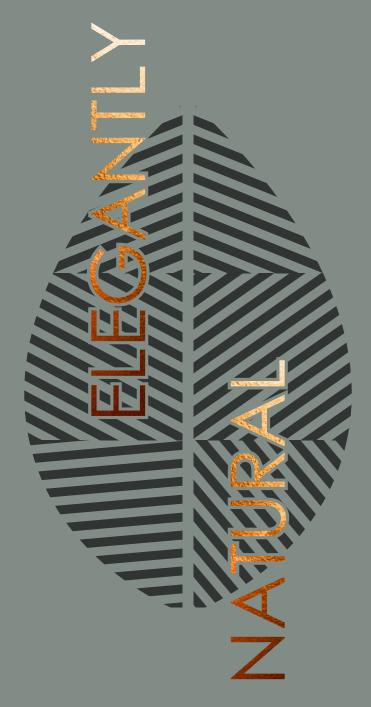









Treelam is about innovation, ingeniousness and execution with the finest form and function. Treelam has been specifically curated to make designer and decorative laminates that has a versatile ethos. Treelam is a range that flaunts a natural flair, where eco-friendly surfaces become a norm and sustainability creates phenomenal possibilities of juxtaposing great aesthetics with enormous poise. Established since 2014, it has an extensive product range consisting of decorative panels, luxurious surfaces, designer laminates, wall panels and more.

www.treelam.com



## ADVANCED FEATURES



The promise of unbreakable OONGS!

"Recommended Adhesive



For exceptional solidity, our Ultra Matt Acrylic Laminates are available in 1.5 mm(+-10%) thickness.



For ease of use and effortless installation, our range of laminates have been developed in a way to keep them extremely light weight.



**BORER FREE** 

Our laminates are specially treated to ensure they remain termite and borer free for life time.



Treated with a special coating on the surface, our Ultra Matt Acrylic Laminates are water proof.



DURABILITY & STRENGTH

Our Ultra Matt Acrylic Laminates are extremely sturdy and durable. They can withstand heavy loads easily.



Our range of laminates has effortless and exceptional adhesion properties, which allows it to be used in vertical applications.





















TR 1171












### Authentic Flair









TR 1106



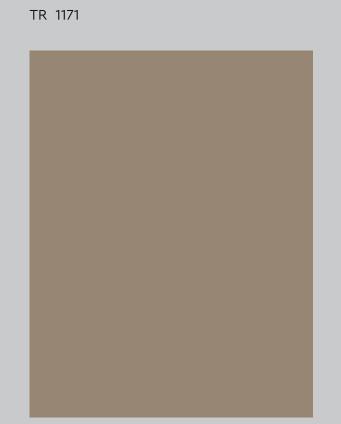





### ULTRA MATT ACRYLIC

















#### Bohemian Elan



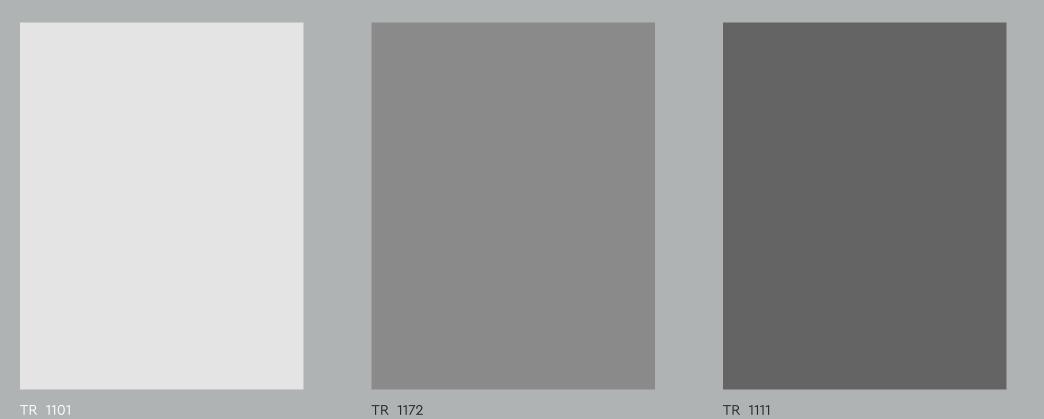



TR 1112 TR 1109

#### ULTRA MATT ACRYLIC















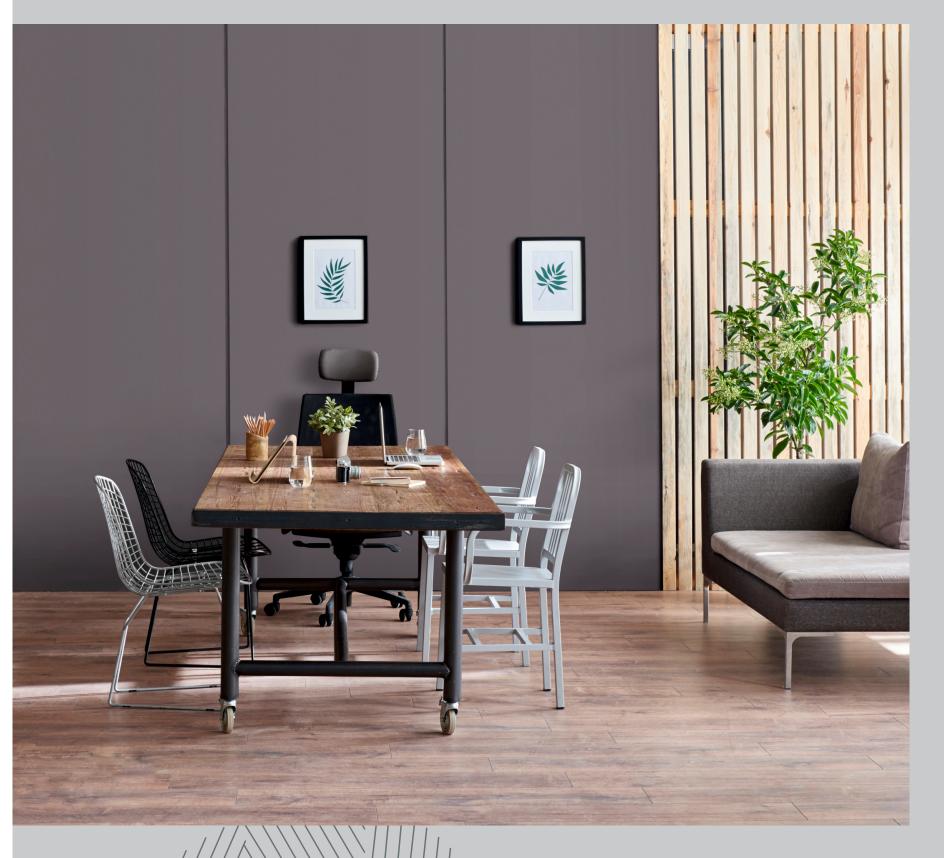




Stylish Touch



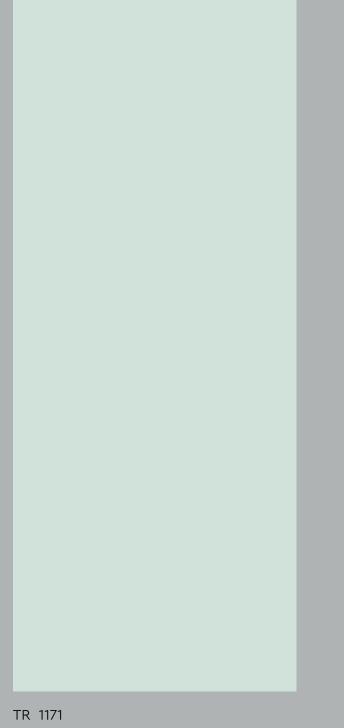



#### ULTRA MATT ACRYLIC



















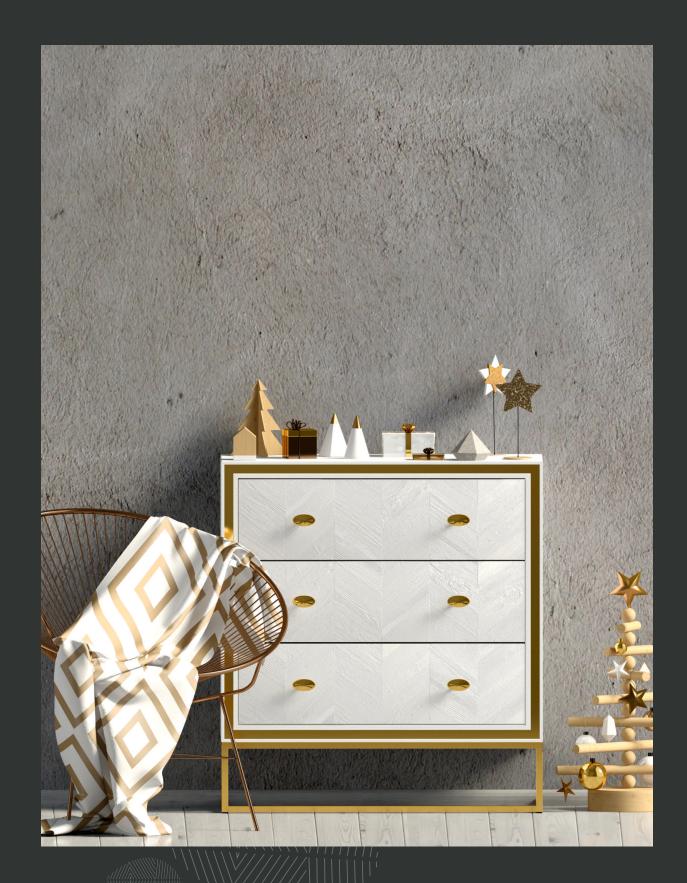



Enamouring Realm



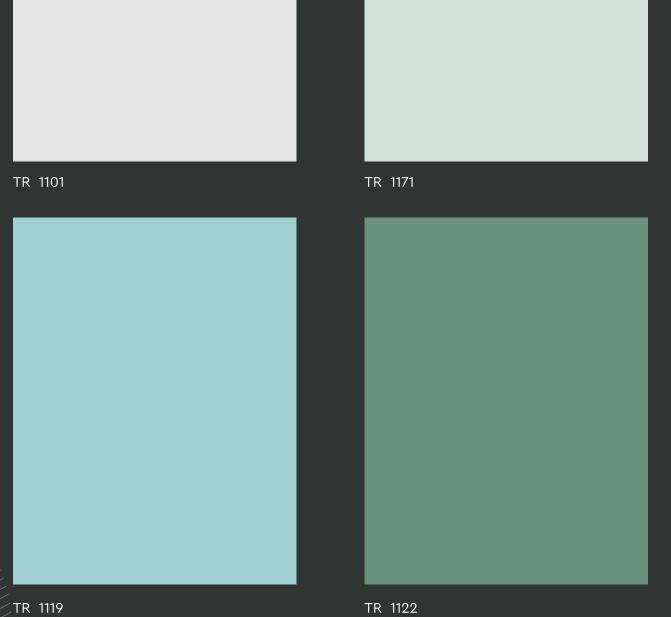

TR 1122 TR 1156


### ----Absolute Finesse










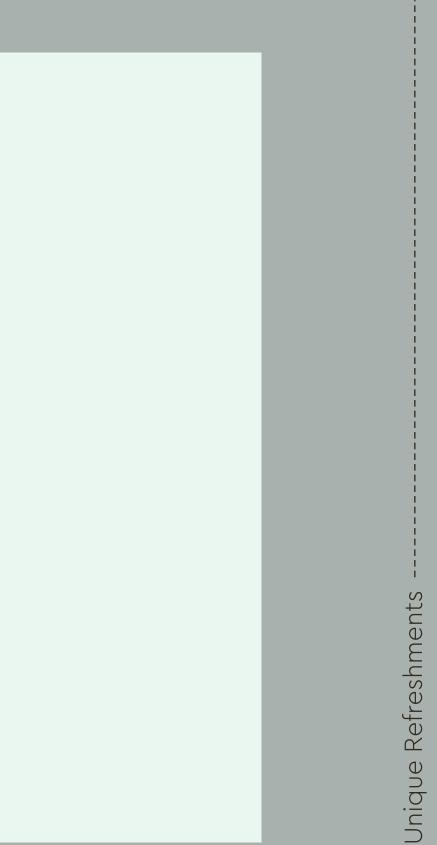

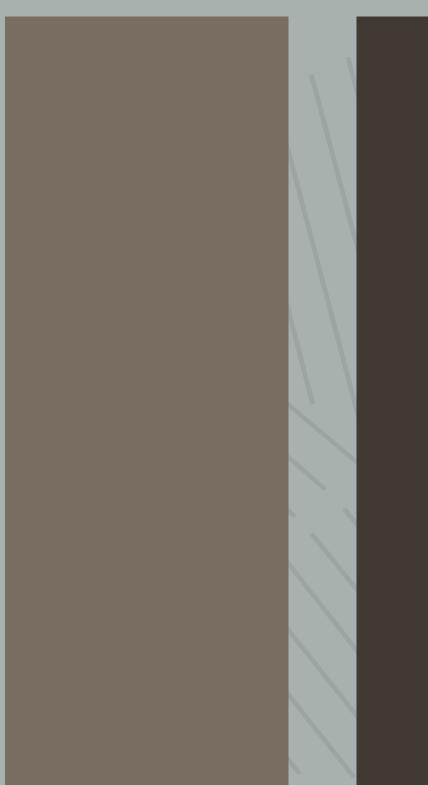





TR 1150

## FAQS

#### Reasons for air bubble formations on Acrylic Sheets



Acrylic are bonded in extremely humid conditions



Use of water base synthetic resin adhesive any other than PEVA (Polyethylene Vinyl Acetate Co-polymer)



When substrate loses moisture after installation



Debonding in certain areas because of uneven substrate surface



Insufficient or lack of pressing during the bonding period of laminate



Use of large size acrylic/PVC laminate sheets


To avoid delamination / air bubbles in between ply and laminate the above steps should be taken care of. Bonding of acrylic sheets shouldn't be completed under high humidity

#### Disclaimer

The Products are tested to be reasonably free of defects, and when used and fabricated properly they will comply with the applicable manufacturing specifications within realistic deviations. We recommend customers to inspect products properly before installing. Product's warranty in no way covers defects and non-compliance from or otherwise attributable to any other causes, including, without limitation the following:

- Improper handling / transportation / storage of Ontari
- Improper installation of Ontari
- Improper or unintended usage of Ontari
- Lack of or improper maintenance of Ontari
- Exposure to high temperatures
- Unauthorized alteration to the products
- Outdoor applications
- Do not use plywood with high moisture content
- Do not use ply with uneven surface
- Avoid using inferior quality adhesive
- Apply sufficient pressure
- Avoid pasting of sheets on the printed/branding area of the Plywood

- There will be no guarantee or exchange under any circumstances
- Color variations in products from different batches are possible
- We recommend using products from same batch to avoid color variations
- This brochure is for presentation purposes only. Actual colors may differ.

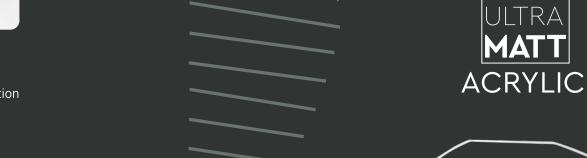





# The promise of unbreakable OOGS!

#### "Recommended Adhesive

\*There can be colour variation in material from different batches. It is advised to use same batch material to avoid colour variations.

Actual colours of the product may vary from this brochure.

Size: 2440 mm x 1220 mm, Thickness: 1.5mm (+- 10%)