

GREENPLY INDUSTRIES LIMITED

Decorative Division, 1501-1505, Narain Manzil, 23, Barakhamba Road, New Delhi - 110001, India. Tel: (91) 11 42791399. E-mail: decosales@greenply.com. Website: www.greenlam.co.in

Green DESIGN STUDIO

AHMEDABAD 109, Ashirwad Paras, Corporate Road, Opposite Prahlad Nagar Garden, Ahmedabad - 380015.

BANGALORE 142, 1st Main Road, Sheshadripuram, Bangalore - 560020. Tel: 080-23317084/ 23445729

BHATINDA Amrik Singh Road, Bhatinda. Tel. 0164-5000234 09041822400/09888241417

BHOPAL Guru Kripa Complex, Shop No. 8, Ground Floor, M. P. Nagar, Zone - II Bhopal. Tel: 0755-2550574

BHUBANESWAR Plot No.14B. Janpath Bapujinagar, Bhubaneswar-751009, Orissa. Tel: 09437364488

ERODE 45/10, Pari Nagar, Perundurai Road, Palayapalayam, Erode-638011. Tel: 0161-2770380
Tel: 9750577771/ 70

HYDERABAD Baniara Hills Road No. 4. Opp. Lane to GVK Mall, Hyderabad - 5000034 Tel: 040-65265236

INDORE: UG 02 Morya Arcade 1/2 Old Palasia, Opp. Palasia Police Station, Indore - 452001

264, New Atish Market, Gopalpura By Pass, Mansarowar, Jaipur Tel: 0141-2399550

LUDHIANA Shop No. 343, Bus Stand Road, Bharat Nagar Chowk, Ludhiana.

RANCHI Rattanlal Compound (Opposite Rospa Tower), Main Road, Ranchi, Jharkhand - 834009. Tel: 0651-2332580

GREEN SHOPPE:

DHANBAD Green Shoppe: Jora Phatak Road, Opp Shakthi Mandir, Dhanbad. Tel: 09334000040/ 09431317007

CHANDIGARH Green Shoppe: SCO 5, Sector 7C, Madhya Marg. Tel: 0172 5077262

KARNAL Green Shoppe: 92, Janta Grain Market, Karnal - 132001

UDAIPUR Green Shoppe: 51, Shastri Marg, Ashok Nagar Main Road, Udaipur - 313001 Tel: 0294 - 2413021

DOMESTIC BRANCHES

AHMEDABAD: 079-26640244/ 26642880 BANGALORE: 080-22118721 BHUBANESHWAR: 0674-2394230 CHANDIGARH: 0172-5073185 CHENNAI: 044-42822672/ 42822673/ 42822671 COIMBATORE: 0422-4370407 DELHI: 011-41040533/32/31 GHAZIABAD: 0120-4131561/ 09717595741 GURGAON: 0124-4221721/4047907 GUWAHATI: 0361-2733306 HYDERABAD: 040-24801429 INDORE: 0731-4230297/4206153 JAIPUR: 0141-4039812/ 2281747 KOCHI: 0484-2531598 KOLKATA: 9748743203/204 LUCKNOW: 0522-4000475 MUMBAI: 022-26125203/ 26125204 NAGPUR: 0712-2421129/ 3296859/ 2420607 NASHIK: 0253 - 2341124 / 2341116 PATNA: 0612-3212527/28 PUNE: 020-26169307 RAIPUR: 0771-6460849 RANCHI: 9934314471/9934314472 ROHTAK: 01262-249502/09996999611 ROURKELA: 9777454080

SILIGURI: 0353-2522428/9800869655 SURAT: 9909983390 THANE: 9167887942 VIJAYWADA: 0866-2523135

















www.greenlamsturdo.com



www.greenlamsturdo.com



CONTENTS

COMPANY OVERVIEW	2	VIBRANCE COLLECTION	62
ENGINEERED TO PERFORM	4	LOCKER SYSTEMS	80
FEATURES		PRIVY DIVIDER PANELS AND HAND HOLDS	98
MATERIAL COMPOSITION	8	OUR CERTIFICATION	100
FRESH ARRIVALS	10	SOME OF OUR PRESTIGIOUS PROJECTS	102
KIDS' COLLECTION	12	ANNEXURE	104
DESIGNER COLLECTION	26	LAMININATE DESIGN COLLECTION	120
CLASSIQUE COLLECTION	36	TECHNICAL SPECIFICATIONS	122



ENGINEERED TO PERFORM

Greenlam Sturdo is an incredible assortment of restroom and locker solutions, embellished with Raw Silk Finish and Anti Bacterial Laminates. It also offers specially adapted Hand Holds for physically disabled and impressive privy Divider Panels which are extensively used for commercial applications and in public areas.

Engineered under indigenous technology, Greenlam Sturdo performs exceptionally even in heavy traffic areas, under high moisture and high humid conditions. Its unique product composition makes it suitable for Indian climatic conditions where toughness, performance and strong visual appeal becomes essential. The company has also paid special attention to the needs of the physically challenged by additionally designing restroom space products in accordance to the ADA (Americans with Disabilities Act, 1990) guidelines. Since customer satisfaction is the utmost priority we make sure that our extensive range of restroom products and Lockers are available on a proper supply basis to ensure timely distribution and installation by our competent technicians. Along with our dedicated after sales service support we also offer an assurance of unprecedented 10 years of warranty on our range of compact laminates against any manufacturing or moisture related defects.



Not just beautiful, these laminates make the surfaces of restrooms and lockers germ-free and secure. Produced by permanently incorporating a US-EPA approved, well-known and widely used anti-microbial agent during the manufacturing, this range ensures complete health and hygiene for you and your family.

Wish you a happy and healthy life ahead!

GREENLAM STURDO RESTROOM CUBICLES AND LOCKER SOLUTIONS

Presenting a new world of restroom cubicles and locker solutions studded with innovative designs and unique features. A remarkable collection of divider panels, doors, locker solutions and restroom cubicles are available in various styles and ranges.





FEATURES

- Available in anti bacterial grade
- Exclusive raw silk finish available
- Manufactured in accordance to ISO 2046
- Formulated by using superior quality high pressure compact laminates
- Built with nylon polyamide, stainless steel and aluminum hardware fittings
- Available in standard and special dimensions to cater to the needs of physically disabled people
- These restroom cubicles and locker solutions are available in various sizes, shapes and colour hues
- Designed for providing better durability and performance
- Hygienic and easy to maintain

6

- Variety of Restroom Cubicles for kids
- Also offers designer cut cubicles for more aesthetic appeal

ADVANTAGES OF GREENLAM STURDO



Hygienic and easy to maintain



Resistant to harmful germs and cleaning agents



Noise deafening system to avid disturbing "door banging" sound



Wide spectrum of colurs to choose from



Resistant to cigarette burns



High quality Compact laminates manufactured as per international standards



High wear and abrasion resistance



Manufactured in strict adherence to accepted fire Safety norms



Best in class international accessories



Equipped with emergency opening provisions



Exceptional water, humidity and high temperature resistance




Germ-free anti-bacterial laminates

7



MATERIAL COMPOSITION

Compact Laminate construction





9

WET VS. DRY RESTROOM SYSTEM

Wet restroom system is the conventional way of setting up a restroom. It generally comprises of a structure made from brick walls and tiles coupled with the required hardwares. One of the major drawbacks of a wet restroom setup is that the partition walls and doors are placed on the floor hence it becomes more prone to water, dust, dirt and stain settlements which leaves a pungent smell. In case of dry restroom, it's equipped with modern designing and is a reasonably priced setup. The main advantage of having this system is-economy of space, usage of 12 mm/18 mm thick partitions and doors incomparison to 150 mm brick walls. There is always a gap maintained between the ground and the partition to avoid dust, dirt and pungent smell.

WHY PREFER A DRY RESTROOM SYSTEM?

Greenlam Sturdo stays class apart due to its usage of dry restroom system. An analysis to support the following is mentioned below:

DISADVANTAGES OF WET SYSTEM

- Cleaning of floor becomes difficult
- Dirt and stains easily settle down on the botton because of its porous surface
- Tile designs can go out of production making it: replacement difficult
- Since the grout joints are porous they can easily absorb pungent smell
- Loss of space Usage of 6' x 6" thick walls result in
- Load of building is high
- No means of natural ventilation is provided

ADVANTAGES OF DRY SYSTEM

- Economy of space-The partition panels are only 12 mm or 18mm thick as compared to 150 mm thick brick wall
- Economy of load-Partitioning systems reduces the load on building as compared to the usage of brick wall
- Reduced installation time- 4 cubicles can be setup in a day
- Neatness- Since no wet work is involved
- Proper air ventilation access is provided in the designs
- Easy floor cleaning-Absence of corners doesn't let the dust to accumulate on the floor
- Vibrant range- Available in different colours and patterns

Greenlam Sturdo collection is formulated by using high pressure, self-supporting, decorative-Greenlam Compact Laminates. Its surface is composed of sheets of decorative paper impegnated with melamine resins and the thickness is achieved with sheets of kraft paper which are infused with thermosetting resins. These sheets are then bonded together by means of heat and high pressure, to make it resistant to stains, extreme temperatures, water, moisture, etc.

Thus, the incomparable distinctiveness of Greenlam Compact Laminates make them ideal for both horizontal and vertical applications where the surface should be functional, durable and decorative.

Adding to that Greenlam Compact Laminates are made anti-bacterial by permanently incorporating a US-EPA approved, well-known and widely used anti-microbial agent during the manufacturing.

HARDWARE DETAILS

To maintain the right balance between performance, economy and aesthetics, Greenlam Sturdo offers you an assortment of hardware fittings. Developed from high quality imported materials, the hardware fittings are available in nylon polyamide, aluminum and stainless steel finishes.

The stainless steel hardware is accessible in two distinct options. They both possess different characteristics which makesthem suitable for diverse applications.

SS Grade 304 is the standard "18/8" stainless steel. It is the most adaptable and widely used stainless steel, available in various forms and finishes. It has an excellent forming and welding characteristics. And while welding thin sections, post-weld annealing is not required due to this. The balanced austenitic structure of SS Grade 304 enables it to be severely deep drawn without intermediate annealing which has made this grade dominant in the manufacture of drawn stainless parts such as sinks, hollow-ware and saucepans.

SS Grade 316 is an improved version of SS Grade 304 since it additionally consists of molybdenum and slightly higher nickel content. The composition of SS Grade 316 gives the steel much increased corrosion resistance in many aggressive environments. Molybdenum makes the steel more resistant to pitting and crevice corrosion in chloride-contaminated media, sea water and acetic acid vapours. SS Grade 316 offers higher strength and better creep resistance at higher temperatures than SS Grade 304. And performs remarkably at sub-zero temperatures due to its excellent mechanical and corrosion properties.

KIDS' COLLECTION

Taking fun a notch higher

Our kids' collection opens up a new world of fun, excitement and adventure with stylish designs.

These cubicles are suited to infant school environments and are versatile with three standard models that make them ideal for nurslings, junior and senior schools.

The optional arched tops to the doors and shaped partitions create a washroom environment that is imaginative and artful whilst providing the necessary requirements for supervisory care.

These cubicles can be manufactured in any combination of colours from the exhaustive colour range and come complete with complementing hardware in stainless steel finish.


Available Models


- Kiddie World
- Crazv Ball
- Picket Fence



KIDDIE WORLD KIDDIE WORLD


EU-ENCLOSED UNIT






Front View

CU-CORNER UNIT





Front View


HARDWARE FIXING DETAILS

All pilasters are supported by L- bracket with floor anchor bolt which is concealed with stainless steel flat box-up of height 100mm. The stainless steel box-up is available in SS Grade 304 and 316 options. The intermediate panels are fixed onto the wall with stainless steel (Grade-304) U- channel section and SS 304 screw insert.




HARDWARE DETAILING


Each restroom cubicle is equipped with the following set of hardware fittings:

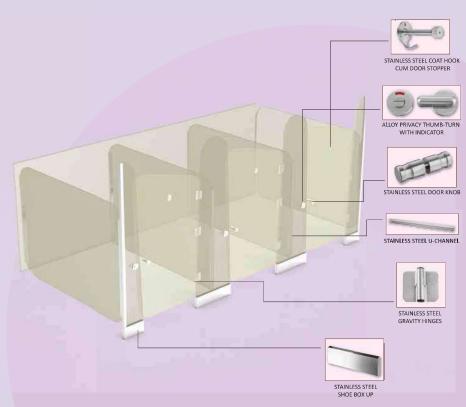


Standard Dimension	Genera l (mm)	Physically challenged (mm)
Width of Cubicle	1000	1500
Depth of cubicle	1500	1700
Height of Divider	1200	1200
Height of entire cubicle	1500	1500
Width of door	600	900
Height of door	1250	1250
Ground clearence	100	100








CU-CORNER UNIT






HARDWARE FIXING DETAILS

All pilasters are supported by L- bracket with floor anchor bolt which is concealed with stainless steel flat box-up of height 100mm. The stainless steel box-up is available in SS Grade 304 and 316 options. The intermediate panels are fixed onto the wall with stainless steel (Grade-304) U- channel section and SS 304 screw insert.





HARDWARE DETAILING


Each restroom cubicle is equipped with the following set of hardware fittings:

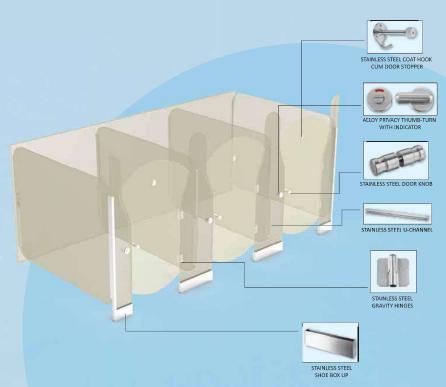

Standard Dimension	Genera l (mm)	Physically challenged (mm)
Width of Cubicle	1000	1500
Depth of cubicle	1500	1700
Height of Divider	1200	1200
Height of entire cubicle	1500	1500
Width of door	600	900
Height of door	1250	1250
Ground clearence	100	100

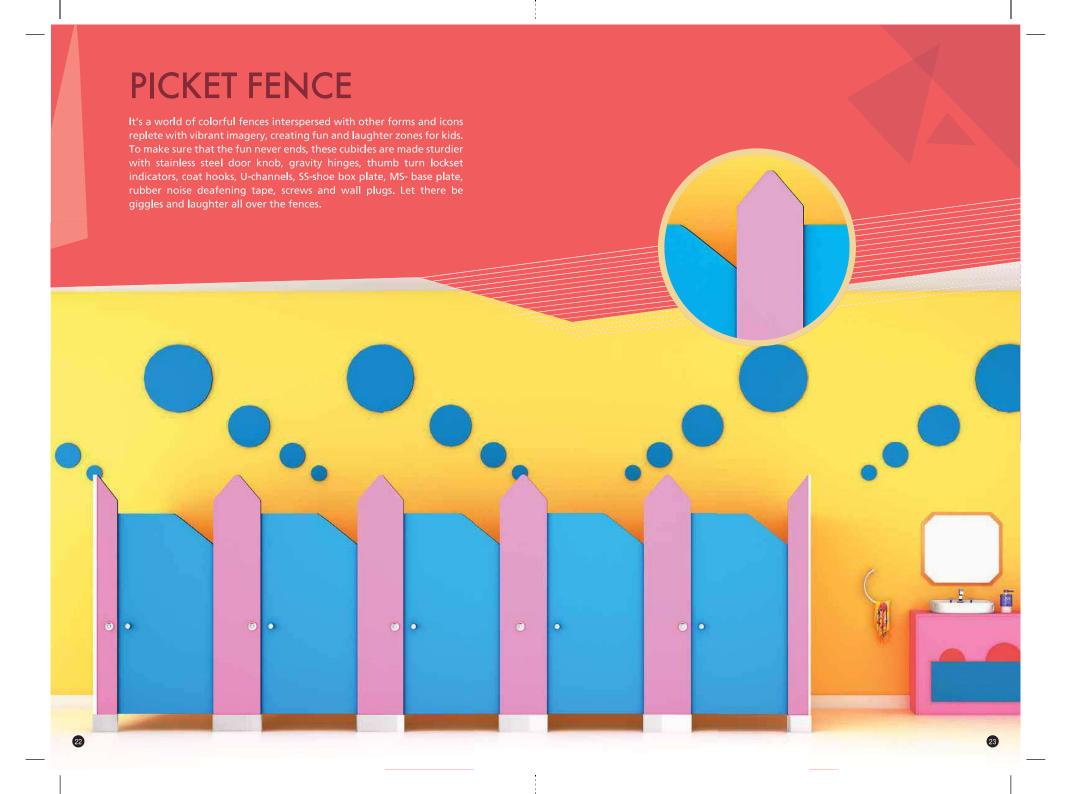







Top View

Front View

CU-CORNER UNIT





Top View

Front View


HARDWARE FIXING DETAILS

All pilasters are supported by L- bracket with floor anchor bolt which is concealed with stainless steel flat box-up of height 100mm. The stainless steel box-up is available in SS Grade 304 and 316 options. The intermediate panels are fixed onto the wall with stainless steel (Grade-304) U- channel section and SS 304 screw insert.



HARDWARE DETAILING

Each restroom cubicle is equipped with the following set of hardware fittings:

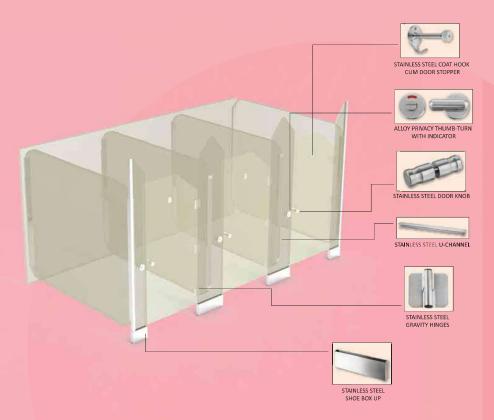

Standard Dimension	Genera l (mm)	Physically challenged (mm)
Width of Cubicle	900	1500
Depth of cubicle	1500	1700
Height of Divider	1200	1200
Height of entire cubicle	1600	1600
Width of door	600	900
Height of door	1250	1250
Ground clearence	100	100

DESIGNER COLLECTION

Offering freedom from limited designs and patterns, Greenlam Sturdo enables you to modify the restroom cubicles into a stylish place. With 2 exclusive designs, these designer restroom cubicles are the answer to your search for a restroom that is as stylish as you are. So just step into the artist's shoe, run your imagination and create the masterpiece with these revolutionary restroom cubicles and transform a mundane space into a designer solution.

Available Models

- ARCS
- ALF

ARCS



Designer Doors & Partitions



0

Alloy Privacy Indicator





Alloy Privacy Thumb turn




Stainless Steel Shoe Box Up








CU-CORNER UNIT





HARDWARE FIXING DETAILS

All pilasters are supported by L- bracket with floor anchor bolt which is concealed with stainless steel flat box-up of height 100mm. The stainless steel box-up is available in SS Grade 304 and 316 options. The intermediate panels are fixed onto the wall with stainless steel (Grade-304) U- channel section and SS 304 screw insert.










HARDWARE DETAILING

Each restroom cubicle is equipped with the following set of hardware fittings:

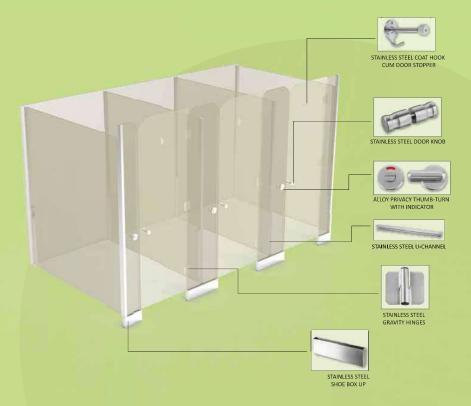


DIMENSION DETAILING


DIMENSION DEIAILING			
Standard Dimension	Genera l (mm)	Physically challenged (mm)	
Width of Cubicle	1000	1500	
Depth of cubicle	1550	1750	
Height of Divider	1830	1830	
Height of entire cubicle	1930	1930	
Width of door	600	900	
Height of door	1830	1830	
Ground clearence	100	100	


Note:

On special demand over all height of front view can be increased up to 2100 mm.




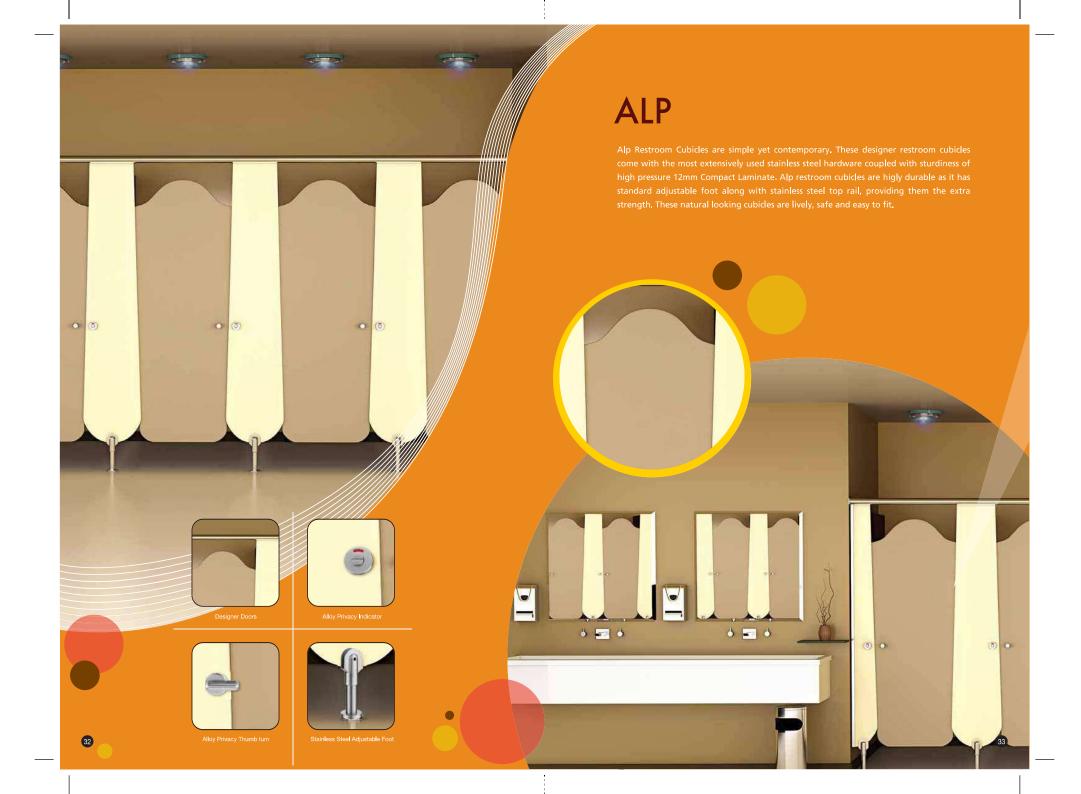






CU-CORNER UNIT






HARDWARE FIXING DETAILS

The adjustable foot that supports the pilasters is made from stainless steel (Grade- 304) and its base is anchored to the floor with SS screw & nylon plug. There is a ground clearance of 150mm. Aluminum U Channel are used to attach with the divider panels to the wall as well as the mid panel with stainless steel (Grade- 304) screw inserts. Aluminum toprail coated in natural anodized color is used to fix the pilaster at the top. Doors are incorporated with the noise deafening tape to reduce the noise effect. All other fittings like hinges, coat hook, adjustable foot and lock set indicator is manufactured in stainless steel.

PILASTER WALL DOO

HARDWARE DETAILING

Each restroom cubicle is equipped with the following set of hardware fittings:

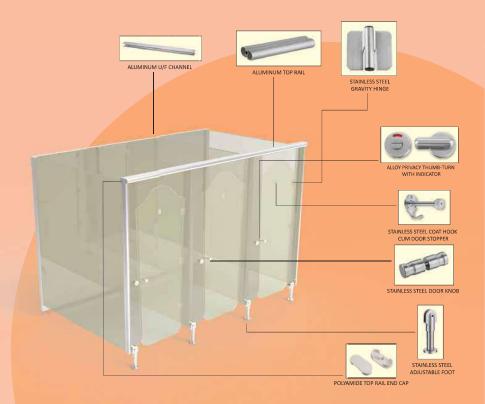

Standard Dimension	Genera l (mm)	Physically challenged (mm)
Width of Cubicle	1000	1500
Depth of cubicle	1500	1750
Height of Divider	1830	1830
Height of entire cubicle	2145	2145
Width of door	600	900
Height of door	1830	1830
Ground clearence	150	150

CLASSIQUE

A commendable assortment of restroom cubicle collection, Classique comes with an eternal classiness of stainless steel and aluminum hardware to give an ideal combination of innovation with durability. Thus, the Classique series is specially formulated to meet various design needs and can be further classified by:

- Different hardware fittings like the standard adjustable foot, shoe box or top rail arrangements
- Combination of different materials use such as aluminum and stainless steel
- Thickness of Compact Laminate-12 mm and 18 mm


Now give your restrooms an admiring look with an extraordinary range available in six unique styles


- Floater
- Wings
- Evergreen
- Invincible
- Grandeur
- Versatile



CLASSIQUE-FLOATER CLASSIQUE-FLOATER

EU-ENCLOSED UNIT





HARDWARE FIXING DETAILS

The aluminum hollow D shape Toprail (Grade- 6063 T-6) is first held to the concrete wall on both ends by MS 'L' angel which is fixed onto the wall with stainless steel screws. The front pilaster are fixed into the Toprail with stainless steel screw insert on the back side on Toprail, the SS U-Channel are attached with the divider panel to the wall as well as the mid panel. There is ground clearance of 150mm



HARDWARE DETAILING

Each restroom cubicle is equipped with the following set of hardware fittings:





Standard Dimensions	Genera l (mm)	Physically Challenged (mm)
Width of cubicle	1000	1500
Depth of cubicle	1500	1750
Height of divider	1785	1785
Height of entire cubicle	2015	2015
Width of door	600	900
Height of door	1760	1760
Ground clearance	150	150



CLASSIQUE-WINGS CLASSIQUE-WINGS

EU-ENCLOSED UNIT






HARDWARE FIXING DETAILS

The aluminum hollow rectangle channel is first held above the false ceiling on both ends by MS'L' angle which is fixed onto the wall with 3 set of quality steel wall plus c/w bolts. The rectangle steel plates are next distributed equally, taking into consideration the position of the pilasters, and fixed onto the hollow MS top rail using bolts and screws.

HARDWARE DETAILING

Each restroom cubicle is equipped with the following set of hardware fittings:

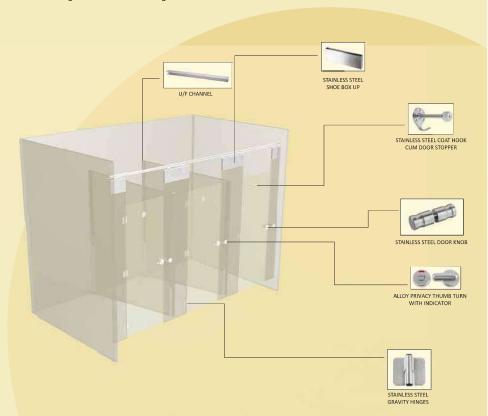

Standard Dimensions	General (mm)	Physically Challenged (mm)
Width of cubicle	1000	1500
Depth of cubicle	1500	1750
Height of entire cubicle	2400	2400
Width of door	600	900
Height of door	1830	1830
Ground clearance	100	100











CLASSIQUE-EVERGREEN


CLASSIQUE-EVERGREEN


EU-ENCLOSED UNIT





CU-CORNER UNIT






TOP VIEW (CU)

HARDWARE FIXING DETAILS

The adjustable foot that supports the pilasters is made from stainless steel (Grade 304) and its base is anchored to the floor with nylon plugs, inserted into ground with stainless steel screws. Aluminum U-channels are attached with the divider panel to the wall as well as the mid panel. There is a ground clearance of 150 mm. Stainless steel top rail with panel tube holder is used to fix the pilasters at the top with the arrangement of tabular holder and wall bracket. Stainless steel corner connectors are provided for imparting extra support to the restroom cubicle of L-shaped system. Further doors are incorporated with the noise deafening tape to reduce the noise effect.

HARDWARE DETAILING

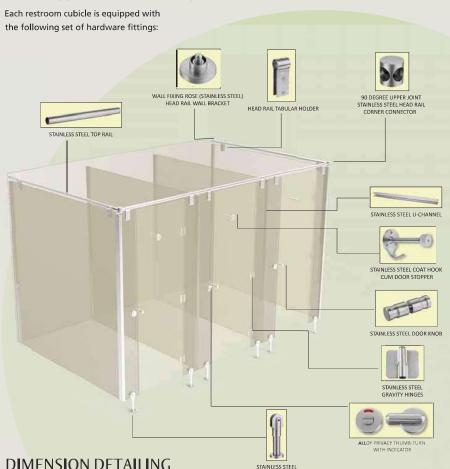


Standard Dimensions	General (mm)	Physically Cha ll enged (mm)
Width of cubicle	1000	1500
Depth of cubicle	1500	1750
Height of entire cubicle	2025	2025
Width of door	600	900
Height of door	1830	1830
Ground clearance	150	150


- Classique's Evergreen comes with stainless steel (Grade 304) top rail arrangement
- · On special demand, overall height of Classique's Evergreen restroom cubicle can be increased up to 2100 mm




CLASSIQUE-INVINCIBLE CLASSIQUE-INVINCIBLE


EU-ENCLOSED UNIT





CU-CORNER UNIT






HARDWARE FIXING DETAILS



HARDWARE DETAILING

Each restroom cubicle is equipped with the following set of hardware fittings:

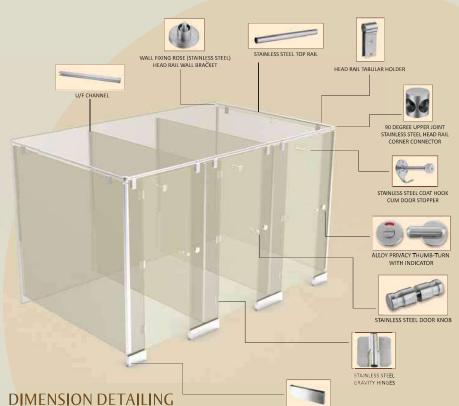

Standard Dimensions	General (mm)	Physically Challenged (mm)
Width of cubicle	1000	1500
Depth of cubicle	1500	1750
Height of entire cubicle	1885	1885
Width of door	600	900
Height of door	1710	1710
Ground clearance	110	110

- . Invincible (12 mm, shoe box up) models come with stainless steel (Grade 304) top rail arrangement
- Invincible (12 mm, shoe box up) model is also available with stainless steel sliding and aluminum top rail fittings
- Shoe box up and adjustable foot are available in two options-stainless steel Grade 304 and 316


STAINLESS STEEL


 On special demand, overall height of restroom cubicle can be increased up to 2100 mm



CLASSIQUE-GRANDEUR CLASSIQUE-GRANDEUR

EU-ENCLOSED UNIT







FRONT VIEW (EU)

TOP VIEW (EU)

CU-CORNER UNIT





FRONT VIEW (CU)

TOP VIEW (CU)

HARDWARE FIXING DETAILS

All pilasters are supported by L-bracket with floor anchor bolt which is concealed with stainless steel flat box up height of up to 110 mm. The stainless steel box up is available in S Grade 304 and 316 options. The intermediate panels are fixed onto the wall with stainless steel (Grade 304) U-channel section and SS 304 screw inserts.










HARDWARE DETAILING

Each restroom cubicle is equipped with the following set of hardware fittings:

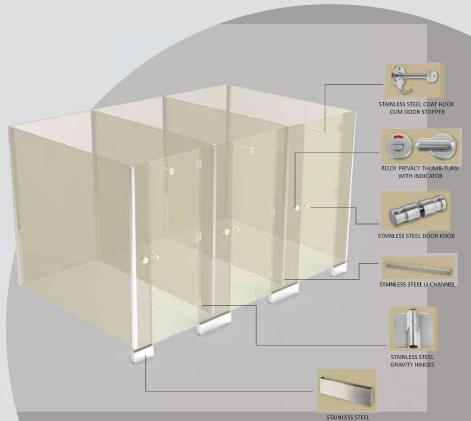

DIMENSION DETAILING

Standard Dimensions		Physically Challenged (mm)
Width of cubicle	1000	1500
Depth of cubicle	1500	1750
Height of entire cubicle	1840	1840
Width of door	600	900
Height of door	1710	1710
Ground clearance	110	110

SHOE BOX UP

Note:


- Only Classique's 18 mm box up series-Grandeur is available without the top rail arrangement.
- The shoe box up model and adjustable foot are available in two options-stainless steel Grade 304 and 316
- On special demand, overall height of restroom cubicle can be increased up to 2100 mm







CLASSIQUE-VERSATILE CLASSIQUE-VERSATILE


EU-ENCLOSED UNIT





CU-CORNER UNIT






HARDWARE FIXING DETAILS

The adjustable foot that supports the pilasters is made from stainless steel (Grade 304) and its base is anchored to the floor with nylon plug, fixed into ground with stainless steel screws. There is a ground clearance of 150 mm. Aluminum U-channels are used to attach with the divider panels to the wall as well as the mid panel with stainless steel (Grade 304) screw inserts. Aluminum top rail coated in stainless steel colour is used to fix the pilasters at the top. Doors are incorporated with the noise deafening tape to reduce the noise effect. All other fittings like hinges, coat hook, adjustable foot and lock set/latch indicator is manufactured in stainless steel



HARDWARE DETAILING

Each restroom cubicle is equipped with the following set of hardware fittings:

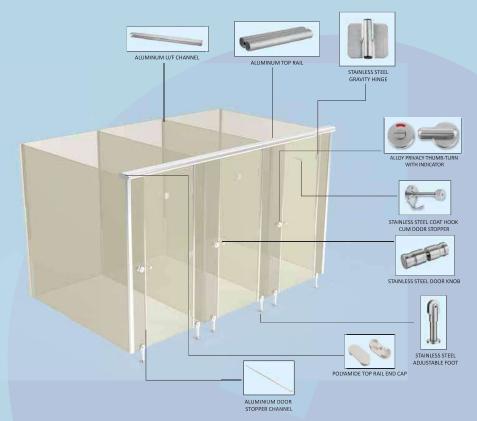

Standard Dimensions	General (mm)	Physically Challenged (mm)
Width of cubicle	1000	1500
Depth of cubicle	1500	1750
Height of entire cubicle	1995	1995
Width of door	600	900
Height of door	1785	1785
Ground clearance	150	150

VIBRANCE

For the everlasting fresh look, Vibrance series offers the perfect combination of functionality and design. Vibrant colours of Compact Laminate accentuated in varied colours of polyamide fittings, is one of the unique feature of this series.

This series brings maximum solution for high wear and tear prone areas like hostels and institutes which require robust build quality. To cater to different architectural layouts and traffic volumes, Vibrance series is equipped with models which can be used-with and without pole construction (Depending on the wear and tear) and for retrofit projects where restroom space comprises of existing walls.


To complement our 12 mm thick Compact Laminate range of different woodgrains and solid colours, hardware fittings for Vibrance series are available in Black, Grey, Cream, Rustic Brown & Champagne colours. With myriad design options this series can be classified into 4 models.

- Rage
- Serene
- Elegance
- Splendid



VIBRANCE-RAGE VIBRANCE-RAGE


EU-ENCLOSED UNIT




FRONT VIEW (EU)

TOP VIEW (EU)

CU-CORNER UNIT





FRONT VIEW (CU)

TOP VIEW (CU)


HARDWARE FIXING DETAILS

The adjustable foot that supports the pilasters is made from corrosion resistant Aluminium and its base is anchored to the floor with nylon plug inserted into ground with stainless steel screws. There is a ground clearance of 150 mm. Aluminum U-channels are used to attach the divider panel with stainless steel (Grade 304) screw inserts to the wall as well as the mid panel. Aluminum top rail (Grade 6063-T5 Alloy) is used to fix the pilasters at the top. Door stopper channel provides the non-rebating doors and connecting panels with extra ordinary look. Further the doors are incorporated with the noise deafening tape to reduce the noise effect.



HARDWARE DETAILING

Each restroom cubicle is equipped with the following set of hardware fittings:

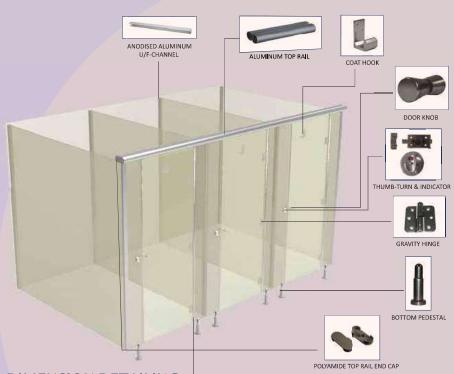


DIMENSION DETAILING

Standard Dimensions	General (mm)	Physically Challenged (mm)
Width of cubicle	1000	1500
Depth of cubicle	1500	1750
Height of entire cubicle	1995	1995
Width of door	600	900
Height of door	1785	1785
Ground clearance	150	150

ALUMINIUM DOOR

67







FRONT VIEW (EU)

TOP VIEW (EU)

CU-CORNER UNIT





FRONT VIEW (CU)


TOP VIEW (CU)

HARDWARE FIXING DETAILS

The adjustable foot that supports the pilasters is made from corrosion resistant nylon (Polyamide 6) and its base is anchored to the floor with nylon plug inserted into ground with stainless steel screws. There is a ground clearance of 150 mm. Aluminum U-channels are used to attach the divider panel with stainless steel (Grade 304) screw inserts to the wall as well as the mid panel. Aluminum top rail (Grade 6063-T5 Alloy) is used to fix the pilasters at the top. Door stopper channel provides the non-rebating doors and connecting panels with extra ordinary look. Further the doors are incorporated with the noise deafening tape to reduce the noise effect.



HARDWARE DETAILING

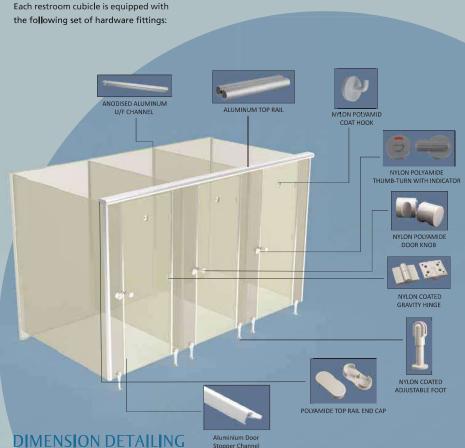

DIMENSION DETAILING

Standard Dimensions

Width of cubicle


Н

Challenged (mm) 1500

leight of entire cubicle	1995	1995
Vidth of door	600	900
leight of door	1785	1785
iround clearance	150	150


1000


VIBRANCE-SERENE

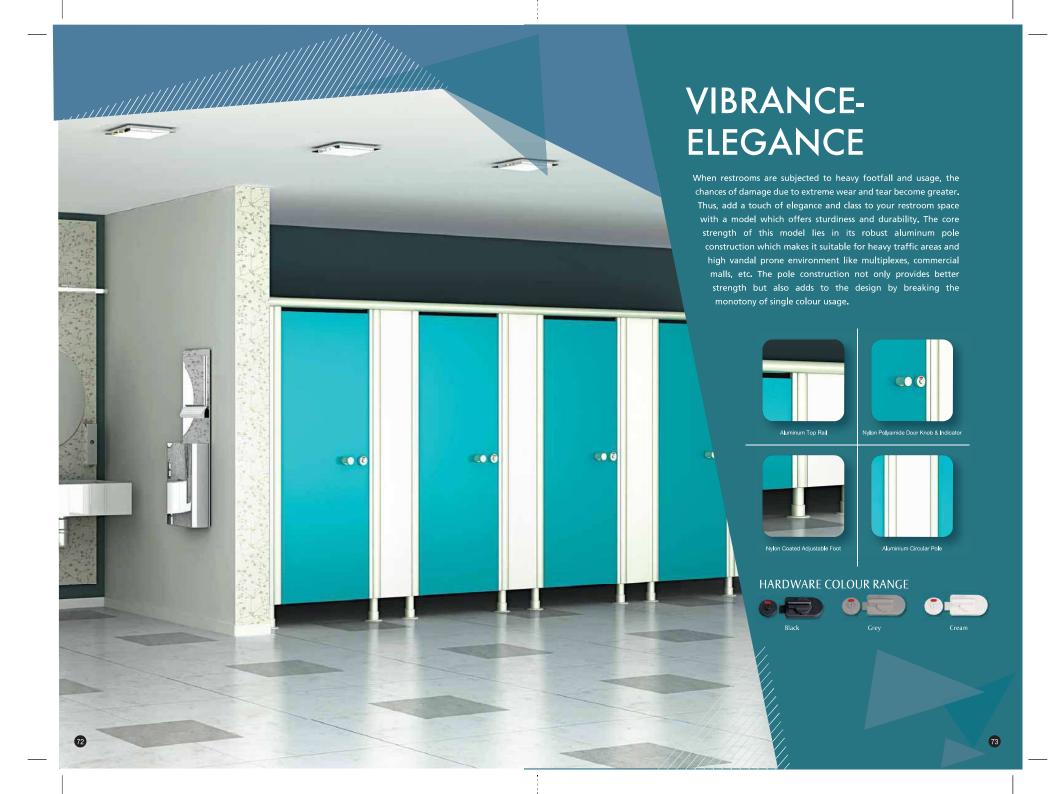


VIBRANCE-ELEGANCE VIBRANCE-ELEGANCE


EU-ENCLOSED UNIT





CU-CORNER UNIT






HARDWARE FIXING DETAILS

The foot that supports the pilasters is made from corrosion resistant aluminum and its base is anchored to the floor with nylon plug inserted into ground with stainless steel screws. There is a ground clearance of 150 mm. Aluminum U-channels are used to fix the divider panel onto the wall with stainless steel (Grade 304) screw inserts to the wall as well as the mid panel. Aluminum top rail (Grade 6063-T5 Alloy) is used to fix the pilasters at the top. Door stopper channel provides the non-rebating doors and connecting panels with extra ordinary look. Further the doors are incorporated with the noise deafening tape to reduce the noise effect.




HARDWARE DETAILING

Each restroom cubicle is equipped with the following set of hardware fittings:

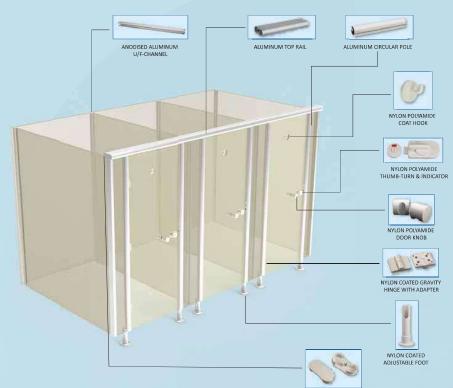


DIMENSION DETAILING

Standard Dimensions	General (mm)	Physically Challenged (mm)
Width of cubicle	1000	1500
Depth of cubicle	1500	1750
Height of entire cubicle	1995	1995
Width of door	600	900
Height of door	1785	1785
Ground clearance	150	150

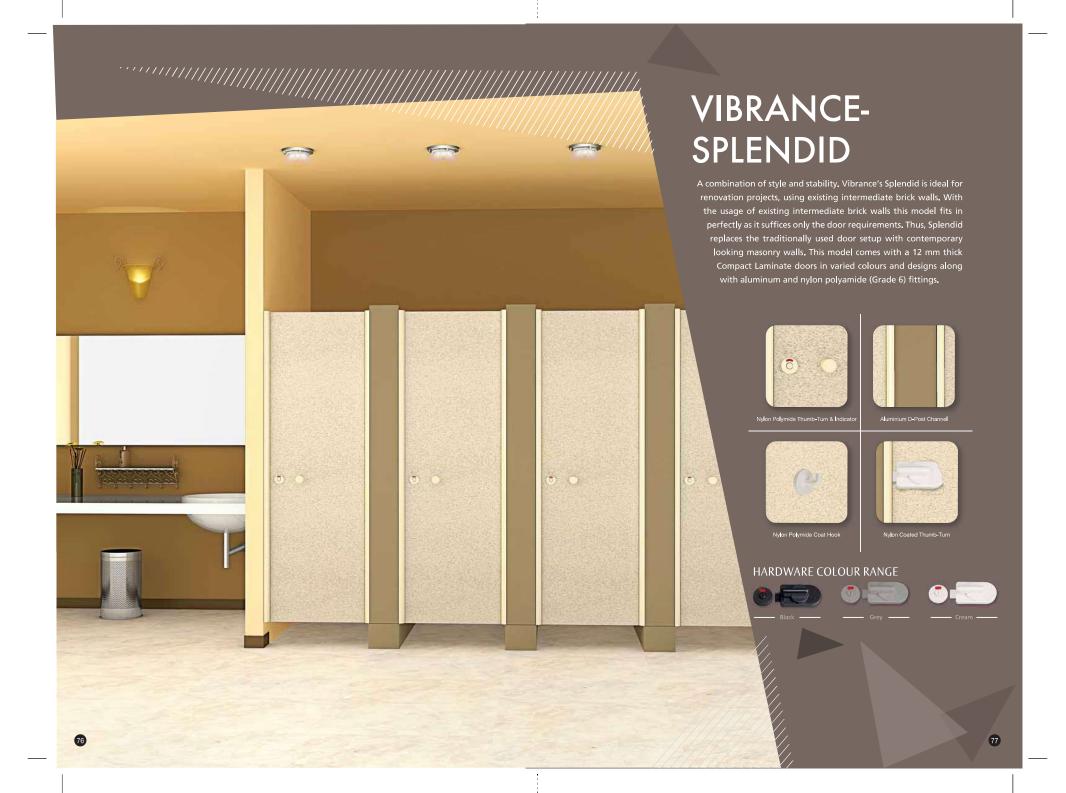


VIBRANCE-SPLENDID VIBRANCE-SPLENDID

EU-ENCLOSED UNIT




FRONT VIEW (EU)



HARDWARE FIXING DETAILS

Doors are supported by a 31.1 mm diameter D-shape aluminum vertical pole. Hardware fittings are made of nylon polyamide (Grade 6) material. Aluminum D-post channels are fixed to the wall with stainless steel (Grade 304) screws and wall plugs. Aluminum vertical poles are incorporated with the noise deafening tape to reduce the noise effect. Further doors are attached to the poles by an arrangement of hinge adaptors and hinges.

HARDWARE DETAILING

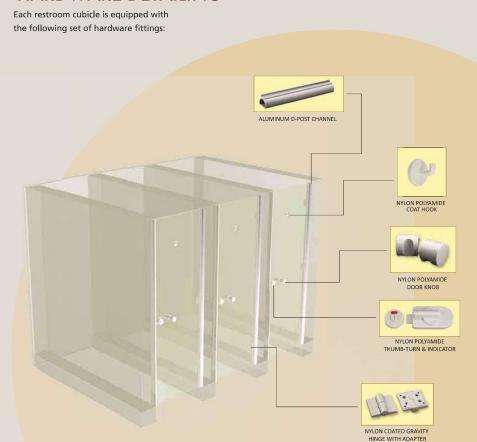

DIMENSION DETAILING

Standard Dimensions	General (mm)	Physically Challenged (mm)
Door width of cubicle	600-900	As this model only uses door applications the
Height of entire cubicle	1980	door applications the dimensions for physically challenged setup will
Height of door	1830	depend on the site's walls
Ground clearance	150	150





PRESENTING



LOCKER SYSTEMS

UNLOCKING THE WORLD'S BEST LOCKER SYSTEMS

Greenlam Sturdo lockers open up a new generation of locker rooms. A world of ultra-modern and exceptionally smart storage solutions made using Greenlam Compact laminates.

Brilliantly designed and widely durable, they are suitable for high humidity areas such as fitness clubs, sauna rooms, swimming pools, retail environments and sports centers.

Available in a wide range of styles, sizes, configurations and colors to achieve a perfect match with your services and interior designs. These systems are extra-tough, environment-friendly, easy to install and even easier to use.


What's more, they come with unique Anti-Bacterial property that makes them a superb choice for hygiene concern areas.

KEY HIGHLIGHTS


- Made using Anti-Bacterial compact laminates (3 mm and 9 mm)
- O Made using heavy duty Aluminium channel
- Provision of 3 locking systems
 - O Customer lock
 - Inbuilt lock
 - Keyless lock


Comes with an option of different base mechanism

- O Stainless Steel leg base
- O Compact Laminate base
- Concrete base

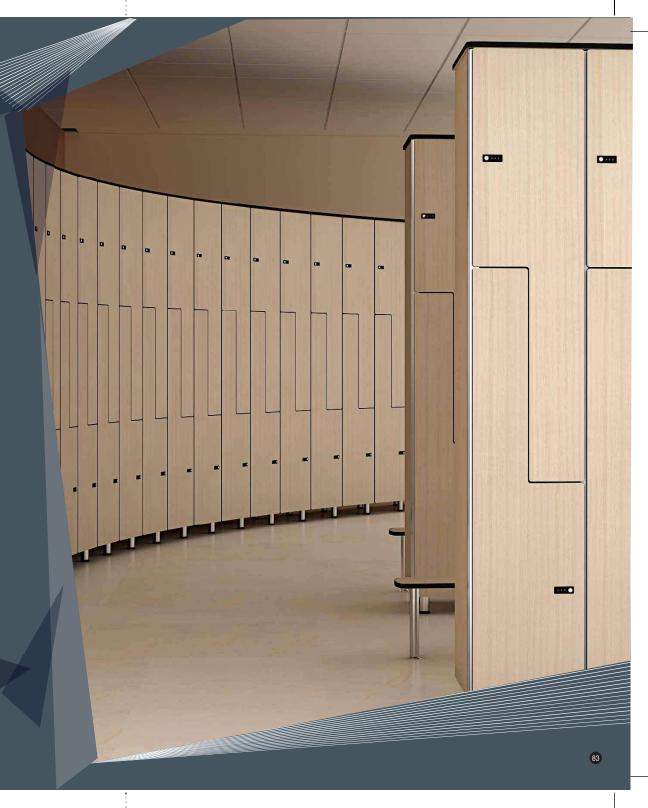



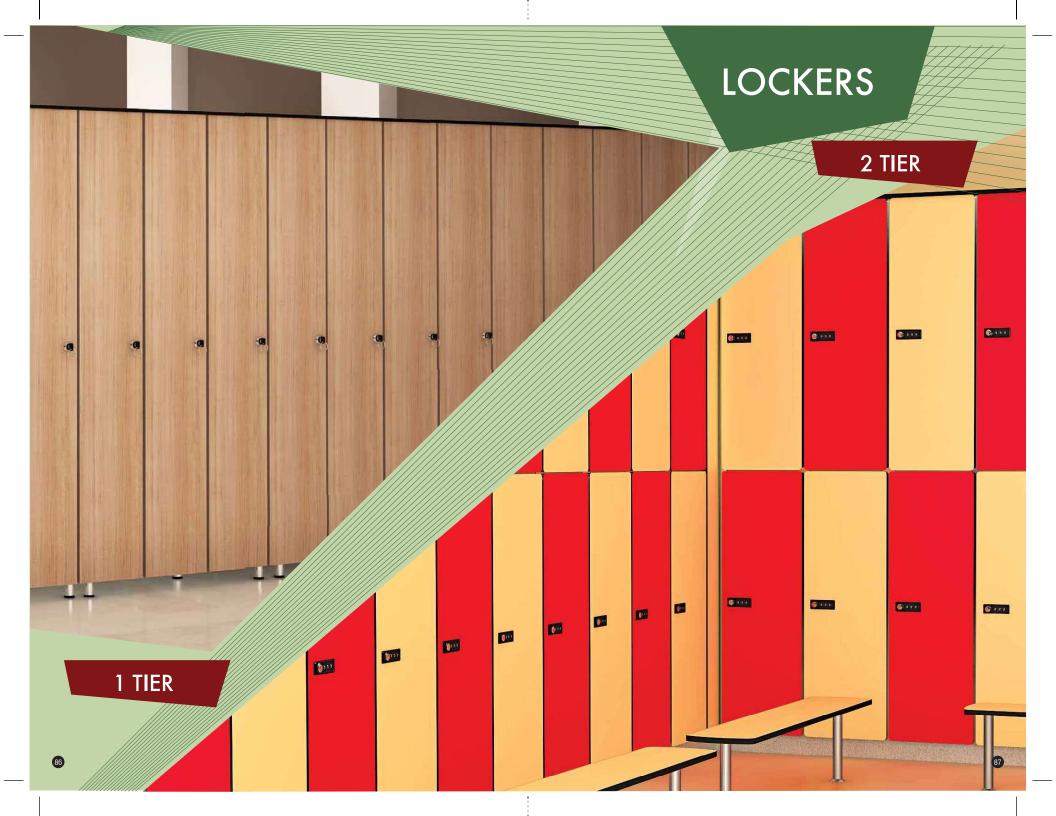

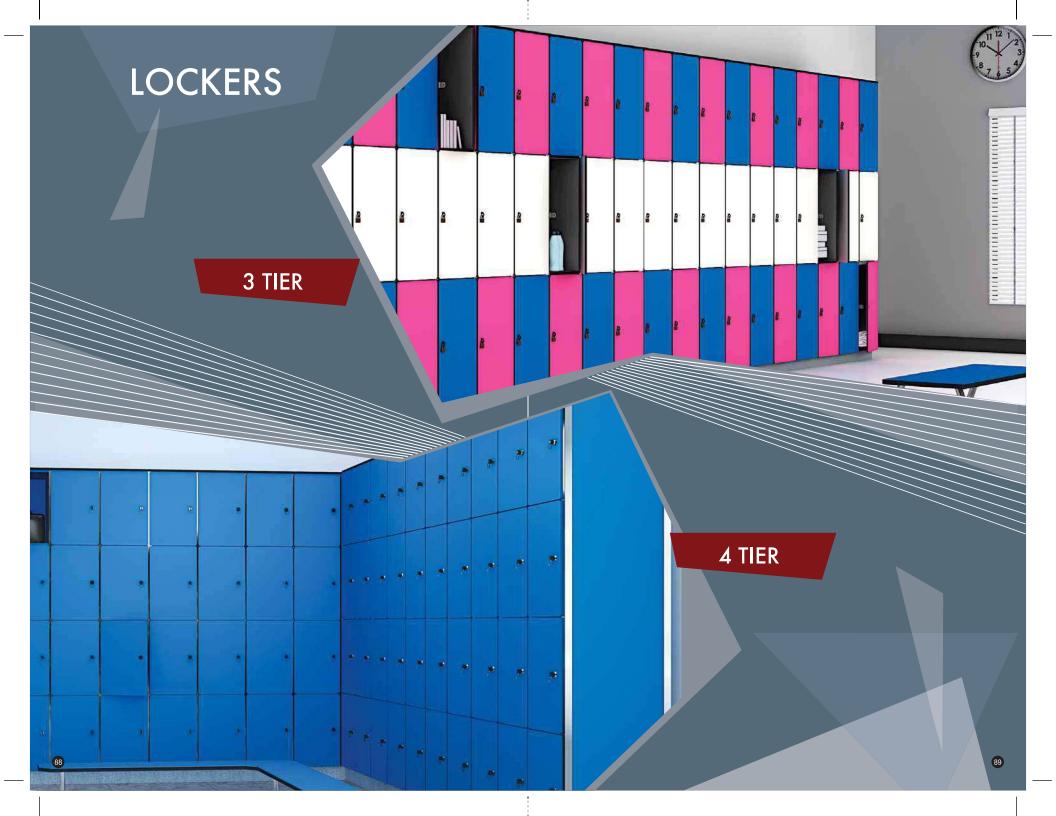





LOCKER COMPONENTS

HINGES


vandal-proof design that is integrated into the aluminum frame and carries a lifetime warranty. The door opens at a wide 175 degree angle for easy access and each locker is self-ventilated around the perimeter of the door where it meets the frame.



HINGE

DOORS, WALLS AND PARTITIONS

Greenlam sturdo locker doors, walls and partitions are made from solid phenolic HPL, an environment friendly but extremely durable material manufactured under high-pressure.

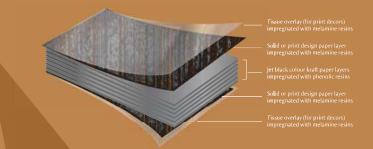

STRUCTURAL CHANNELS




Aluminum Profile

Greenlam sturdo locker systems mutually integrated assembly eliminates the need for glue or permanent less expensive to ship, easy to install, ideal for retrofit reassembled with no compromise to the materials







OUTLINE


1 TIER



DIMENSION DETAILING

Dimension Denvie	
Standard Dimensions	Size (mm)
Width of Locker	300
Depth of Locker	450
Height of Locker	1800


2 TIER



DIMENSION DETAILING


Standard Dimensions	General (mm)
Width of Locker	300
Depth of Locker	450
Height of Locker	895

3 TIER



DIMENSION DETAILING

Standard Dimensions	Size (mm)
Width of Locker	300
Depth of Locker	450
Height of Locker	594




4 TIER

DIMENSION DETAILING

Standard Dimensions	Size (mm)
Width of Locker	300
Depth of Locker	450
Height of Locker	443


5 TIER



DIMENSION DETAILING

Standard Dimensions	Size (mm)
Width of Locker	300
Depth of Locker	450
Height of Locker	353

6 TIER



Front View

DIMENSION DETAILING

Standard Dimensions	Size (mm)
Width of Locker	300
Depth of Locker	450
Height of Locker	292

Z TYPE



PRIVY DIVIDER PANELS

Give a new meaning to your restroom space with vibrant coloured Privy Divider Panel laminates (urinal partitions) coupled with rust resistant stainless steel fittings. Composed with superior product features to provide greater privacy and hygiene to the users. The urinal partitions are manufactured using 12 mm thick Compact Laminates. accordance IS-2046-199/BSEN-438(1)-91. Further its product composition consists of one undivided piece, chamfered edges with no joints in between which provides a cleaner and well structured look to your restroom space. Equipped with the comprehensive series of conventional designs, Privy Divider Panels are available in exciting colours and shapes and promises to give your restroom space an exquisite yet organised look.



HAND HOLDS

Ergonomically designed, Hand Holds collection is an arrangement of flexible tubes and connectors that provides customised and creative designs for guide railings, support bars, handrails and stairways. These products are produced of anti-corrosive nylon fixtures along with high quality aluminum fittings. To provide extra support and safety, vertical and horizontal application options along with left and right handed product versions are made available. It gives utmost advantages like hygiene, easy maintenance, anti-static surface and durability.

These heavy duty grab bars are manufactured in accordance to ADA (Americans with Disabilities Act, 1990) guidelines for providing stability and the extra assistance to the physically disabled. They can be adjusted as per your needs and are available in three standard colours-black, grey and cream and in five distinct models.

Model A Model B Floor UL — FN Floor DL Elevation (Urinal Partition) Elevation (Urinal Partition)

DIMENSIONS

- Total Height: 1000-1200 mm
- Depth: 450-550 mm
- Gap from ground floor: 500-600 mm

HARDWARE DETAILING

Each divider panel is equipped with the following hardware

• Stainless steel L-clamp is used to attach the divider to the wall

HARDWARE FIXING DETAILS

Stainless steel L-clamp hardware fittings along with SU-304 screws are used to fix the urinal partitions on the wall.

Hardware detailing

Wall plugs

Black

Screws

Hardware fixing details

Hardware Colour Options

• Wall plugs and screws are provided for fixing the grab bars

Z Safety Support Bar



L Safety Support Bar



Horizontal & Vertical Safety Support Bar



Grab Rail with Intermediate Wall Support





Stainless Steel L-Clamp

Annexure

Annexure

KIDDIE WORLD

Bill of Quantities:Toilet Block Work

	Bill of Quantities:Toilet Block Work							
S. No.	ITEM DESCRIPTION	APPROVED MAKE	BASIC PR I CE	REMARKS FLOOR	QUANTITY TOTAL	UNIT	RATE	AMOUNT
1.00	Partitions & Associated Works							
1.00	Toilet Cubicle							
	Supplying & fixing in position GREENLAM STURDO, KIDDIE WORLD Toilet Cubicle (of following standard dimension which includes 600mm door size width) made of heat, bacteria, water, chemical, scratch and impact resistant 12mm thick solid compact laminate panels including doors, pilasters & intermediate panels finished with approved texture/shade as per the detail drawings & as per IS 2046 (Indian Standard). The compact lam should have Green Guard Certificate.It should be anti bactrial (certified by Shri Ram Test House) This also includes providing and fixing in position necessary hardware made out of Stainless steel304 GRADE: (1) Door Knob, (2) Gravity hinges, (3) Thumb turn indicators, (4) Coat Hooks, (5) U-Channels, (6) Shoe box (7) Shoe box side cover (8) L bracket (Floor anchor) (9) Noise Deafening Tape etc. (9) Screws (stainless steel in 304 Grade with satin finish) & wall Plugs. The all pilaster are supported by L bracket with floor anchor bolt, The L bracket is concealed with stainless steel flat box up of up to 100 mm height. The stainless steel flat box up of up to 100 mm height. The stainless steel flat box up of up to 100 mm height. The stainless steel flat box up of up to 100 mm height. The stainless steel flat box up of up to 100 mm height. The stainless steel flat box up of up to 100 mm height. The stainless steel flat box up of up to 100 mm height. The stainless steel flat box up of up to 100 mm height. The stainless steel flat box up of up to 100 mm height. The stainless steel flat box up of up to 100 mm height. The stainless steel flat box up of up to 100 mm height. The stainless steel flat box up of up to 100 mm height. The stainless steel flat box up of up to 100 mm height. The stainless steel flat box up of up to 100 mm height. The stainless steel flat box up of up to 100 mm height. The stainless steel flat box up of up to 100 mm height. The stainless steel flat box up of up to 100 mm height. The stainless steel flat box up of up to 100 mm height. The stainless steel flat box up of up to 100 m	Kiddie World model of Greenlam Sturdo						
1.01	Toilet Cubicle with standard dimension Front 12mm thick with 1500mm Height x 1000mm Width (Door Size 600mmx1250mm), Partition 12mm thick 1500mm Depth x 1300mm height (Including gap of 100mm), which includes 600mm door size width). L type					Nos		
1.02	Toilet Cubicle I-Shape (Front Partition) with standard dimension of 12mm thick ,1500mm Height x 1000mm Width which includes 600 mm x 1250mm door size width).					Nos		
	All aspects specified by the manufactures, Greenlam Sturdo Classique Invincible Series.					Nos		
104	*Raw silk finish is available on special demand.							

CRAZY BALLS

S. No.	ITEM DESCRIPTION	APPROVED MAKE	BASIC PRICE	REMARKS FLOOR	QUANTITY TOTAL	UNIT	RATE	AMOUNT
1.00	Partitions & Associated Works							
1.00	Toilet Cubicle							
	Supplying & fixing in position GREENLAM STURDO, CRAZY BALLS Toilet Cubicle (of following standard dimension which includes 600mm door size width) made of heat, bacteria, water, chemical, scratch and impact resistant 12mm thick solid compact laminate panels including doors, pilasters & intermediate panels finished with approved texture/shade as per the detail drawings & as per IS 2046 (Indian Standard). The compact lam should have Green Guard Certificate.lt should be anti bactrial (certified by Shri Ram Test House) This also includes providing and fixing in position necessary hardware made out of Stainless steel304 GRADE: (1) Door Knob, (2) Gravity hinges, (3) Thumb turn indicators, (4) Coat Hooks, (5) U-Channels, (6) Shoe box (7) Shoe box side cover (8) L bracket (Floor anchor) (9) Noise Deafening Tape etc. (9) Screws (stainless steel in 304 Grade with satin finish) & wall Plugs. The all pilaster are supported by L bracket with floor anchor bolt, The L bracket is concealed with stainless steel flat box up of up to 100 mm height. The stainless steel flat box up of up to 100 mm height. The stainless steel shoe box is available in S5 304 & 316 Grade options. The divider panels are fixed on to the wall with stainless steel U channel section and SS Grade 304 screw inserts	Crazy Balls model of Greenlam Sturdo						
1.01	Toilet Cubicle with standard dimension Front 12mm thick with 1500mm Height x 1000mm Width (Door Size 600mmx1250mm), Partition 12mm thick 1500mm Depth x 1300mm height (Including gap of 100mm), which includes 600mm door size width). L type					Nos		
1.02	Toilet Cubicle I-Shape (Front Partition) with standard dimension of 12mm thick ,1500mm Height x 1000mm Width which includes 600 mm x 1250mm door size width).					Nos		
	All aspects specified by the manufactures, Greenlam Sturdo Classique Invincible Series.					Nos		
	*Raw silk finish is available on special demand.							105

PICKET FENCE

Bill of Quantities:Toilet Block Work

	Bill of Quantities:Toilet Block Work							
S. No.	ITEM DESCRIPTION	APPROVED MAKE	BASIC PRICE	REMARKS FLOOR	QUANTITY TOTAL	UNIT	RATE	AMOUNT
1.00	Partitions & Associated Works							
1.00	Toilet Cubicle							
	Supplying & fixing in position GREENLAM STURDO, PICKET FENCE Toilet Cubicle (of following standard dimension which includes 600mm door size width) made of heat, bacteria, water, chemical, scratch and impact resistant 12mm thick solid compact laminate panels including doors, pilasters & intermediate panels finished with approved texture/shade as per the detail drawings & as per IS 2046 (Indian Standard). The compact lam should have Green Guard Certificate.It should be anti bactrial (certified by Shri Ram Test House) This also includes providing and fixing in position necessary hardware made out of Stainless steel304 GRADE: (1) Door Knob, (2) Gravity hinges, (3) Thumb turn indicators, (4) Coat Hooks, (5) U-Channels, (6) Shoe box (7) Shoe box side cover (8) L bracket (Floor anchor) (9) Noise Deafening Tape etc. (9) Screws (stainless steel in 304 Grade with satin finish) & wall Plugs. The all pilaster are supported by L bracket with floor anchor bolt, The L bracket is concealed with stainless steel flat box up of up to 100 mm height. The stainless steel shoe box is available in SS 304 & 316 Grade options. The divider panels are fixed on to the wall with stainless steel U channel section and SS Grade 304 screw inserts.	Picket Fence model of Greenlam Sturdo						
1.01	Toilet Cubicle with standard dimension Front 12mm thick with 1600mm Height x 1000mm Width (Door Size 600mmx1250mm), Partition 12mm thick 1500mm Depth x 1300mm height (Including gap of 1000mm), which includes 600mm door size width). L type					Nos		
1.02	Toilet Cubicle I-Shape (Front Partition) with standard dimension of 12mm thick ,1600mm Height x 1000mm Width which includes 600 mm x 1250mm door size width).					Nos		
	All aspects specified by the manufactures, Greenlam Sturdo Classique Invincible Series.					Nos		
106	* Raw silk finish is available on special demand.							

ARCS

S. No.	ITEM DESCRIPTION	APPROVED MAKE	BASIC PRICE	REMARKS FLOOR	QUANTITY TOTAL	UNIT	RATE	AMOUNT
1.00	Partitions & Associated Works							
1.00	Toilet Cubicle							
	Supplying & fixing in position GREENLAM STURDO, ARCS Toilet Cubicle (of following standard dimension which includes 600mm door size width) made of heat, bacteria, water, chemical, scratch and impact resistant 12mm thick solid compact laminate panels including doors, pilasters & intermediate panels finished with approved texture/shade as per the detail drawings & as per 15 2046 (Indian Standard). The compact lam should have Green Guard Certificate.lt should be anti bactrial (certified by Shri Ram Test House) This also includes providing and fixing in position necessary hardware made out of Stainless steel 304 GRADE: (1) Door Knob, (2) Gravity hinges, (3) Thumb turn indicators, (4) Coat Hooks, (5) U-Channels, (6) Shoe box (7) Shoe box side cover (8) L bracket (Floor anchor) (9) Noise Deafening Tape etc. (9) Screws (stainless steel in 304 Grade with satin finish) & wall Plugs. The all pilaster are supported by L bracket with floor anchor bolt, The L bracket is concealed with stainless steel shoe box is available in SS 304 & 316 Grade options. The divider panels are fixed on to the wall with stainless steel U channel section and SS Grade 304 screw inserts,	Arcs model of Greenlam Sturdo						
1.01	Toilet Cubicle with standard dimension Front 12mm thick with 1930mm Height x 1000mm Width (Door Size 600mmx1830mm) ,Partition 12mm thick 1550mm Depth x 1930mm height (Including gap of 100mm), which includes 600mm door size width). L type					Nos		
1.02	Toilet Cubicle I-Shape (Front Partition) with standard dimension of 12mm thick, 1930mm Height x 1000mm Width which includes 600 mm x 1250mm door size width).					Nos		
	All aspects specified by the manufactures, Greenlam Sturdo Arcs.					Nos		
	*Raw silk finish is available on special demand.							107

ALP

Bill of Quantities:Toilet Block Work

S. No.	ITEM DESCRIPTION	APPROVED MAKE	BASIC PRICE	REMARKS FLOOR	QUANTITY TOTAL	UNIT	RATE	AMOUNT
1.00	Partitions & Associated Works		_					
1.00	Toilet Cubicle							
	Supplying & fixing in position GREENLAM STURDO,ALP Toilet Cubicle (of following standard dimension which includes 600mm door size width) made of heat, bacteria, water, chemical, scratch and impact resistant 12mm thick solid compact laminate panels including doors, pilasters & intermediate panels finished with approved texture/shade as per the detail drawings & as per IS 2046 (Indian Standard). The compact lam should have Green Guard Certificate.It should be anti bactrial (certified by Shri Ram Test House)							
	This also includes providing and fixing in position necessary hardware made out of Alluminium (Grade-6063- T6) & SS 304 GRADE With Alluminium Supporting systems (1) Door Knob, (2) Gravity hinges, (3) Latchlock indicators, (4) Top rail, (5) Coat Hooks, (6) U-Channels, (7) Door stopper channel (8) SS Adjustable foot (9)Noise Deafening Tape etc. (10) Screws (stainless steel in 304 Grade with satin finish) & wall Plugs.	ALP model of Greenlam Sturdo						
	The adjustable foot support the pilaster and its based is anchored to the floor with stainless stell & nylon plug fixed in to ground, there U channel are used to attached the divider pannels to the wall. the alluminium toprail coated in natural anodised color to used to fix the pilaster at the top.							
1.01	Toilet Cubicle with standard dimension Front 12mm thick with 2145mm Height x 1000mm Width (Door Size 600mmx1830mm), Partition 12mm thick 1550mm Depth x 1980mm height (Including gap of 150mm), which includes 600mm door size width L type.					Nos		
1.02	Toilet Cubicle I-Shape (Front Partition) with standard dimension of 12mm thick ,2145mm Height x 1000mm Width which includes 600 mm x 1830mm door size width).					Nos		
	All aspects specified by the manufactures, Greenlam Sturdo ALP.					Nos		
108	*Raw silk finish is available on special demand.							

CLASSIQUE FLOATER

S. No.	ITEM DESCRIPTION	APPROVED MAKE	BASIC PRICE	REMARKS FLOOR	QUANTITY TOTAL	UNIT	RATE	AMOUNT
1.00	Partitions & Associated Works							
1.00	Toilet Cubicle							
	Supplying & fixing in position GREENLAM STURDO, Classique Floater Toilet Cubicle (of following standard dimension which includes 600mm door size width) made of heat, bacteria, water, chemical, scratch and impact resistant 12mm thick solid compact laminate panels including doors, pilasters & intermediate panels finished with approved texture/shade as per the detail drawings & as per IS 2046 (Indian Standard). The compact lam should have Green Guard Certificate. It should be anti bactrial (certified by Shri Ram Test House)							
	This also includes providing and fixing in position necessary hardware made out of Alluminium (Grade-6063- T6) & SS 304 GRADE With Alluminium Supporting systems (1) Door Knob, (2) Gravity hinges, (3) Latchlock indicators, (4) Top rail, (5) Coat Hooks, (6) U-Channels, 97) Door stopper channel (8) Noise Deafening Tape etc, (9) Screws (stainless steel in 304 Grade with satin finish) & wall Plugs.	Classique Floater model of Greenlam Sturdo						
	The top Supporting system will run on the concrete wall to Strengthen & Support the systems, it will be sattled on end wall with MS 'L' angles Mid & End pilasters will be fixed with the top support.							
1.01	Toilet Cubide with standard dimension Front 12mm thick with 2015 Height x 1000mm Width (Door Size 600mmx1760mm), Partition 12mm thick 1550mm Depth x 1930mm height (Including gap of 150mm), which includes 600mm door size width). L type					Nos		
1.02	Toilet Cubicle I-Shape (Front Partition) with standard dimension of 12mm thick, 2015mm Height x 1000mm Width which includes 600 mm x 1760mm door size width).					Nos		
	All aspects specified by the manufactures, Greenlam Sturdo Classique Floater Series.					Nos		
	*Raw silk finish is available on special demand.							109

CLASSIQUE'S WINGS

Bill of Quantities:Toilet Block Work

	Bill of Quantities:Toilet Block Work									
S. No.		APPROVED MAKE	BASIC PRICE	REMARKS FLOOR	QUANTITY TOTAL	UNIT	RATE	AMOUNT		
1.00	Partitions & Associated Works									
1,00	Toilet Cubicle									
	Supplying & fixing in position Greenlam Sturdo Classique Wings Toilet Cubicle (of following standard dimension which includes 600mm door size width) made of heat, bacteria, water, chemical, scratch, impact and anti bacterial resistant 12mm &18mm thick solid compact laminate panels tested by Shriram Test House Finish of the compact laminate should be Suede / *Raw Silk, which includs doors, pilasters & intermediate panels finished with approved texture/shade as per the detail drawings & as per 15 2046 (Indian Standard) and as per fire retardant BS-476/97 standard. The product should have Green Guard Certificate. This also includes providing and fixing in position necessary hardware made out of Stainless steel (Grade 304) & With MS Supporting systems (1) SS Door Knob, (2) SS Gravity hinges, (3) SS Thumbturn lock indicator, (4) MS Top Support, (5) SS- Coat Hook, (6) SS U-Channels, (7) SS shoe box (8) Shoe box side cover, (9) Noise Deafening Tape etc., (10) Screws & wall Plugs. The top supporting system will run above the ceiling to Strengthen & support the systems, it will be sattled on end wall with MS 'L' angles Mid & End pilasters will be fixed with the top support All other hardware & screws will of stainless steel in 304 Grade with satin finish.	Classique- Wings model of Greenlam Sturdo								
1.01	Toilet Cubicle with standard dimension Front 18mm thick with 2400 Height x 1000mm Width (Door Size 600mmx1830mm), Partition 12mm thick 1550mm Depth x 1930mm height (Including gap of 100mm).					Nos				
1.02	Toilet Cubicle I-Shape (Front Partition) with standard dimension of 18mm thick, 2400mm Height x 1000mm Width which includes 600 mm x 1830mm door size width).					Nos				
	All aspects specified by the manufactures, Greenlam Sturdo Classique Wings Model or equivalent.									
	*Raw silk finish is available on special demand.									
110	** This model is specially recommended for enclosed type units for better performance.									

CLASSIQUE'S EVERGREEN

S. No.	ITEM DESCRIPTION	APPROVED MAKE	BASIC PRICE	REMARKS FLOOR	QUANTITY	UNIT	RATE	AMOUNT
1.00	Partitions & Associated Works	IVIARE	TRICE	FLOOK	TOTAL			
1,00	Toilet Cubicle							
	"Providing & fixing Greenlam Sturdo Classique Evergreen Toilet Cubicle (of following standard dimension which includes 600mm door size width) made of heat, bacteria, water, chemical, scratch, impact and anti bacterial resistant 12mm thick solid compact laminate panels tested by Shriram Test House. Finish of the compact laminate should be Suede *Raw silk, which includs doors, pilasters & intermediate panels finished with approved texture/shade as per the detail drawings & as per IS 2046 (Indian Standard) and as per fire retardant BS-476-97 standard. The product should have Green Guard Certificate.	Classique- Evergreen model of Greenlam Sturdo						
	This also includes providing and fixing in position necessary hardware made out of Stainless steel (Grade 304) as per manufacturer's specifications & Architects instructions like (1) Door Knob, (2) Gravity Hinges, (3) Thumb turn lockset with Occupancy indicators, (4) Coat hooks with Door stopper (5) U-Channels, (6) Adjustable foot/pedestal, (7) Top rail with Corner conntector (8) Rubber noise deafening tape, (9) Screws & wall Plugs.							
	The top fitting should consist of SS round top rail which will get fixed with pilasters, with SS panel tube holder, SS corner bend (connected with top rail) will be used on the corner of cubicle in absence of brick wall, SS wall fixing is used only on the wall which will hold the ss top rail.							
	All screws will of 304 Grade in stainless steel with satin finish. All pilasters are supported by stainless steel Bottom Cladding. The base of the stainless steel bottom cladding will be anchored to the floor with a clearance height upto 150mm. "							
1.01	Toilet Cubicle with standard dimension of 2025mm Height x 1000mm Width x 1550mm Depth, which includes 600mm door size width).					Nos		
1.02	Toilet Cubicle I-Shape (Front Partition) with standard dimension of 2025mm Height x 1000mm Width which includes 600mm door size width).					Nos		
	All aspects specified by the manufactures, Greenlam Sturdo Classique Evergreen Model or equivalent.							
	*Raw silk finish is available on special demand.							_

CLASSIQUE'S INVINCIBLE

Bill of Quantities:Toilet Block Work

	Bill of Quantit	APPROVED	BASIC	REMARKS	QUANTITY			
S. No.	ITEM DESCRIPTION	MAKE	PRICE	FLOOR	TOTAL	UNIT	RATE	AMOUNT
1.00	Partitions & Associated Works							
1.00	Toilet Cubicle							
	Providing & fixing Greenlam Sturdo Classique Invincible Toilet Cubicle (of following standard dimension which includes 600mm door size width) made of heat, bacteria, water, chemical, scratch, impact and anti bacterial resistant 12mm thick solid compact laminate panels tested by Shriram Test House. Finish of the compact laminate should be Suede /* Raw Silk, which includs doors, pilasters & intermediate panels finished with approved texture/shade as per the detail drawings & as per IS 2046 (Indian Standard) and as per fire retardant BS-476/97 standard. The product should have Green Guard Certificate. This also includes providing and fixing in position necessary hardware made out of Stainless steel (Grade 304) as per manufacturer's specifications & Architects instructions like (1) Door Knob, (2) Gravity Hinges, (3) Thumb turn lockset indicators, (4) Coat hooks, (5) U-Channels, (6) SS-Shoe Box Plate (7) MS-Base Plate, (8) Top rail with Corner connector (9) Rubber noise deafening tape (10) Screws & wall Plugs. The top fitting should consist of SS round top rail which will get fixed with pilasters, with SS panel tube holder, SS corner bend (connected with top rail) will be used on the corner of cubicle in absence of brick wall, SS wall fixing is used only on the wall which will hold the ss top rail. All screws will of 304 Grade in stainless steel with satin finish. All pilasters are supported by stainless steel Bottom Cladding. The base of the stainless steel bottom cladding will be anchored to the floor with a dearance height upto 110mm.	Classique-I nvincible model of Greenlam Sturdo						
1.01	Toilet Cubicle with standard dimension of 1885mm Height x 1000mm Width x 1550mm Depth, which includes 600mm door size width).					Nos		
1.02	Toilet Cubicle I-Shape (Front Partition) with standard dimension of 1885mm Height x 1000mm Width which includes 600mm door size width).					Nos		
	All aspects specified by the manufactures, Greenlam Sturdo Classique Invincible Model or equivalent.							
112	* Raw silk finish is available on special demand.							

CLASSIQUE'S GRANDEUR

	Bill of Quantitie	es:Toilet	Block	Work				
S. No.		APPROVED MAKE	BASIC PRICE	REMARKS FLOOR	QUANTITY TOTAL	UNIT	RATE	AMOUNT
1.00	Partitions & Associated Works							
1,00	Toilet Cubicle							
	Providing & fixing Greenlam Sturdo Classique Grandeur Toilet Cubicle (of following standard dimension which includes 600mm door size width) made of heat, bacteria, water, chemical, scratch, impact anti bacterial resistant 18mm thick solid compact laminate panels tested by Shriram Test House. Finish of the compact laminate should be Suede / *Raw Silk, which includs doors, pilasters & intermediate panels finished with approved texture/shade as per the detail drawings & as per IS 2046 (Indian Standard) and as per fire retardant 85-476/97 standard, The product should have Green Guard Certificate. This also includes providing and fixing in position necessary hardware made out of Stainless steel (Grade 304) as per manufacturer's specifications & Architects instructions like (1) Door Knob, (2) Gravilly Hinges, (3) Thumb turn lockset indicators, (4) Coat hooks, (5) U-Channels, (6) SS-Shoe Box Plate (7) MS-Base Plate, (8) Rubber noise deafening tape (9) Screws & Wall Plugs. All screws will of 304 Grade in stainless steel with satin finish, All pilasters are supported by MS-Base steel Bottom Cladding with Stainless Steel Shoe Box Plate. The base of the stainless steel shoe box will be anchored to the floor with a clearance height upto 110mm. Fixing of intermediate panels to the wall shall be stainless steel '1' – Bracket or stainless U-Channel section are fixed into wall with screw inserts.	Clasique-G randeur model of Greenlam Sturdo						
1.01	Toilet Cubicle with standard dimension of 1840mm Height x 1000mm Width x 1550mm Depth, which includes 600mm door size width).					Nos		
1.02	Toilet Cubicle I-Shape (Front Partition) with standard dimension of 1840mm Height x 1000mm Width which includes 600mm door size width).					Nos		
	All aspects specified by the manufactures, Greenlam Sturdo Classique Grandeur Model or equivalent.							
	*Raw silk finish is available on special demand.							

CLASSIQUE'S VERSATILE

Bill of Quantities:Toilet Block Work

	Bill of Quantit	APPROVED	BASIC	REMARKS	QUANTITY			
S. No.	ITEM DESCRIPTION	MAKE	PRICE	FLOOR	TOTAL	UNIT	KAIE	AMOUNT
1.00	Partitions & Associated Works							
1,00	Toilet Cubicle							
	Providing & fixing Greenlam Sturdo Classique Versatile Toilet Cubicle (of following standard dimension which includes 600mm door size width) made of heat, bacteria, water, chemical, scratch, impact and anti bacterial resistant 12mm thick solid compact laminate panels tested by Shriram Test House. Finish of the compact laminate should be Suede / *Raw Silk, which includes doors, pilasters & intermediate panels finished with approved texture/shade as per the detail drawings & as per IS 2046 (Indian Standard) and as per fire retardant BS-476/97 standard. The product should have Green Guard Certificate. This also includes providing and fixing in position necessary hardware made out of Stainless steel (Grade 304) & Aluminium powder coated top rail as per manufacturer's specifications & Architects instructions like (1) SS Door Knob, (2) SS Gravity hinges, (3) SS Thumb turn lockset indicators, (4) Aluminum Powder Coated Top Rail, (5) SS Coat Hooks, (6) SS U-Channels, (7) SS Adjustable Foot, (8) Noise Deafening Tape etc. (9) Screws & wall Plugs. The top fitting should consist of Aluminium Powder Coated top rail which will get fixed with Mid & End pilasters. All other hardware & screws will of stainless steel in 304 Grade with satin finish. Top rail is extruded Aluminium will be powder coated or anodized (Grade 6063 Micron Aluminium). All pilasters are supported by stainless steel adjustable footing with non corrosive steel inserts.	Classique- Versatile model of Greenlam Sturdo						
1.01	Toilet Cubicle with standard dimension of 1955mm Height x 1000mm Width x 1550mm Depth, which includes 600mm door size width).					Nos		
1.02	Toilet Cubicle I-Shape (Front Partition) with standard dimension of 1955mm Height x 1000mm Width which includes 600mm door size width).					Nos		
	All aspects specified by the manufactures, Greenlam Sturdo Classique Versatile Model or equivalent.							
114	* Raw silk finish is available on special demand.							

VIBRANCE'S RAGE

Bill of Quantities:Toilet Block Work										
S. No.		APPROVED MAKE	BASIC PRICE	REMARKS FLOOR	QUANTITY TOTAL	UNIT	RATE	AMOUNT		
1.00	Partitions & Associated Works									
1,00	Toilet Cubicle									
	Providing & fixing Greenlam Sturdo Vibrance Rage Toilet Cubide (of following standard dimension which includes 600mm door size width) made of heat, bacteria, water, chemical, scratch, impact and anti bacterial resistant 12mm thick solid compact laminate panels tested by Shriram Test House, Finish of the compact laminate should be Suede /*Raw Silk, which includs doors, pilasters & intermediate panels finished with approved texture/shade as per the detail drawings & as per 15 2046 (Indian Standard) and as per fire retardant BS-476/97 standard. The product should have Green Guard Certificate. This also includes providing and fixing in position necessary hardware made out of aluminium & having Gun Metal finish, as per manufacturer's specifications & Architects instructions like (1) Door Knob, (2) Gravity Hinges, (3) Thumb turn lockset with Occupancy indicator, (4) Coat Hook (5) U-Channel, (6) Adjustable foot/pedestal, (7) Aluminum Powder Coated Top Rail, (8) Rubber noise deafening tape, (9) Screws & wall Plugs. The top fitting should consist of Aluminium Powder Coated top rail which will get fixed with Mid & End pilasters. All screws will of 304 Grade in stainless steel with satin finish. All pilasters are supported by stainless steel Bottom Cladding. The base of the stainless steel bottom cladding will be anchored to the floor with a clearance height upto 150mm.	Vibrance's Rage model of Greenlam Sturdo								
1.01	Toilet Cubicle with standard dimension of 1995mm Height x 1000mm Width x 1550mm Depth, which includes 600mm door size width).					Nos				
1.02	Toilet Cubicle I-Shape (Front Partition) with standard dimension of 1995mm Height x 1000mm Width which includes 600mm door size width).					Nos				
	All aspects specified by the manufactures, Greenlam Sturdo Vibrancee Rage Model or equivalent.									
	*Raw silk finish is available on special demand.									

VIBRANCE'S SERENE

Bill of Quantities:Toilet Block Work

	Bill of Quantities:Toilet Block Work									
S. No.	ITEM DESCRIPTION	APPROVED MAKE	BASIC PRICE	REMARKS FLOOR	QUANTITY TOTAL	UNIT	RATE	AMOUNT		
1.00	Partitions & Associated Works									
1,00	Toilet Cubicle									
	Providing & fixing Greenlam Sturdo Vibrance Serene Toilet Cubicle (of following standard dimension which includes 600mm door size width) made of heat, bacteria, water, chemical, scratch, impact and anti bacterial resistant 12mm thick solid compact laminate panels tested by Shriram Test House, Finish of the compact laminate should be Suede / *Raw Silk, which includs doors, pilasters & intermediate panels finished with approved texture/shade as per the detail drawings & as per IS 2046 (Indian Standard) and as per fire retardant 85-476/97 standard. The product should have Green Guard Certificate.									
	This also includes providing and fixing in position necessary hardware made out of Nylon Polyamide Grade-6 & Aluminium powder coated top rail as per manufacturer's specifications & Architects instructions like (1) Door Knob, (2) Gravity Hinges, (3) Thumb turn lockset indicators, (4) Aluminum Top Rail, (5) Coat Hooks, (6) U-Channels, (7) Adjustable Foot, (8) Noise Deafening Tape (9) Screws & wall plugs etc.	Vibrance- Serene model of Greenlam Sturdo								
	The top fitting should consist of Aluminium Powder Coated top rail which will get fixed with Mid & End pilasters.									
	All screws will of 304 Grade in stainless steel with satin finish. Top rail is extruded Aluminium will be powder coated or anodized (Grade 6063 Micron Aluminium). All pilasters are supported by grade- 6 Nylon Polyamide Thermoplastic palm design pedestal footing with non corrosive steel inserts. The base diameter 65mm and neck diameter of 33mm anchored to the floor with grade 304 satin finish stainless steel screws with push fit capping at a clearance height of 150mm. Model is Heat and Bacteria Resistant Polyamide in which aluminium U-Channel will be used for the fixing of intermediate panels to the wall.									
1.01	Toilet Cubicle with standard dimension of 1995mm Height x 1000mm Width x 1550mm Depth, which includes 600mm door size width).					Nos				
1.02	Toilet Cubicle I-Shape (Front Partition) with standard dimension of 1995mm Height x 1000mm Width which includes 600mm door size width).					Nos				
	All aspects specified by the manufactures, Greenlam Sturdo Vibrance Serene Model or equivalent.									
116	*Raw silk finish is available on special demand,									

VIBRANCE'S ELEGANCE

S. No.	ITEM DESCRIPTION	APPROVED MAKE	BASIC PRICE	REMARKS FLOOR	QUANTITY TOTAL	UNIT	RATE	AMOU
1.00	Partitions & Associated Works			TEGON.	101712			
1,00	Toilet Cubicle							
	Providing & fixing Greenlam Sturdo Vibrance Elegance Toilet Cubicle (of following standard dimension which includes 600mm door size width) made of heat, bacteria, water, chemical, scratch, impact and anti bacterial resistant 12mm thick solid compact laminate panels tested by Shriram Test House. Finish of the compact laminate should be Suede / *Raw Silk, which includs doors, pilasters & intermediate panels finished with approved texture/shade as per the detail drawings & as per IS 2046 (Indian Standard) and as per fire retardant BS-476/97 standard. The product should have Green Guard Certificate. This also includes providing and fixing in position necessary hardware made out of Nylon Polyamide Grade-6 & Aluminium powder coated top rail as per manufacturer's specifications & Architects instructions like (1) Verticle Post Door Channel (anodized), (2) Hinges Adaptors, (3) Gravity Hinges (4) Privacy Thumbturn c/w Occupancy Indicator, (5) Coat Hook, (6) Door Knob, (7) Noise Deafening Tape (8) Screws & wall Plugs. The Top rail should be extruded Aluminium which should be powder coated or anodized (Grade 6063 Micron Aluminium), Pilaster to be supported and frame with 50mm diameter vertical post with circular vertical poll foot and Intermediate panel is anchored to the wall with powder coating or anodized aluminium U & F Channel, Door panel should be fixed by 80mm diameter vertical post with noise deafening tape. All screws will of 304 Grade in stainless steel with satin finish,	Vibrance's Elegance model of Greenlam Sturdo						
1,01	Toilet Cubicle with standard dimension of 1995mm Height x 1000mm Width x 1550mm Depth, which includes 600mm door size width).					Nos		
1.02	Toilet Cubicle I-Shape (Front Partition) with standard dimension of 1995mm Height x 1000mm Width which includes 600mm door size width).					Nos		
	All aspects specified by the manufactures, Greenlam Sturdo Vibrance Elegance Model or equivalent.							
	*Raw silk finish is available on special demand.							

Annexure

VIBRANCE'S SPLENDID

Bill of Quantities:Toilet Block Work

	Bill of Quantiti	APPROVED	BASIC	REMARKS	QUANTITY			
S. No.	ITEM DESCRIPTION	MAKE	PRICE	FLOOR	TOTAL	UNIT	RATE	AMOUNT
1.00	Partitions & Associated Works							
1,00	Toilet Cubicle							
	Providing & fixing Greenlam Sturdo Vibrance Splendid Toilet Cubicle (of following standard dimension which includes 600mm door size width) made of heat, bacteria, water, chemical, scratch, impact and anti bacterial resistant 12mm thick solid compact laminate panels tested by Shriram Test House. Finish of the compact laminate should be Suede / *Raw Silk, which includs doors, pilasters & intermediate panels finished with approved texture/shade as per the detail drawings & as per IS 2046 (Indian Standard) and as per fire retardant 85-476/97 standard. The product should have Green Guard Certificate. This also includes providing and fixing in position necessary hardware made out of Nylon Polyamide Grade-6 & Aluminium powder coated top rail as per manufacturer's specifications & Architects instructions like (1) D Post Door Channel (anodized), (2) Hinges Adaptors, (3) Gravity Hinges (4) Privacy Thumbturn c/w Occupancy Indicator, (5) Coat Hook, (6) Door Knob, (7) Noise Deafening Tape (8) Screws & wall Plugs. All the hardware shall be made of polyamide-6 material. Aluminium D-Post channel of 40mm dia which should be fixed to the wall with SS-304 screws, Door is gripped with the poles by an arrangement of hinge adaptor & hinges. Aluminium poles are incorporated with the rubber strip to reduce the noise effect.	Vibrance- Splendid model of Greenlam Sturdo						
1.01	Toilet Cubicle with standard dimension of 1980mm Height x 600mm to 900mm Width.					Nos		
	All aspects specified by the manufactures, Greenlam Sturdo Vibrance Splendid model or equivalent.							
118	* Raw silk finish is available on special demand.							

LOCKERS

S. No.	ITEM DESCRIPTION	APPROVED MAKE	BASIC PRICE	REMARKS FLOOR	QUANTITY TOTAL	UNIT	RATE	AMOUNT
1.00	Partitions & Associated Works							
1,00	Toilet Cubicle							
	Supplying & fixing in position GREENLAM LOCKER ,Locker made of heat, bacteria, water, chemical, scratch and impact resistant 03mm & 09mm thick solid compact laminate panels including doors, self, side pannel, Top & Bottom panels finished with approved texture/shade as per the detail drawings & as per IS 2046 (Indian Standard). The compact lam should have Green Guard Certificate.lt should be anti bactrial (certified by Shri Ram Test House) This also includes providing and fixing in position necessary hardware made out of Alluminium (Grade-Go8-T6) & Stailess steel (grade-304) (1) Cam lock (2) Hinges, (3) Front section (4) Back section , (5) Infill section (6) Rubber lining (9) Screws & Nut bolt Locker shall be constructed with 4 alluminium interlocking supporting frame work, making it strong and rigid.	Locker model of Greenlam Sturdo						
1,01	Standard dimension of locker unit shall be: Width 300mm x Depth 450mm x Height 1800mm Locker 1 Tier - Locker 5 Tier - Locker 2 Tier - Locker 6 Tier - Locker 3 Tier - Locker 2 Shaped					Nos		
	All aspects specified by the manufactures, Greenlam Sturdo Locker Series					Nos		as